


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

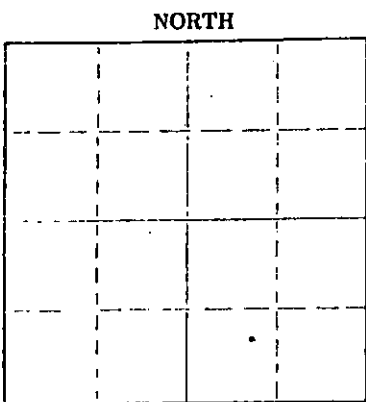

Stafford County. Sec. 20 Twp. 21 Rge. (E) 13(W)
Location as "NE/CNW&SW" or footage from lines. SW NE NE
Lease Owner Woodman & Lannitti Drilling Co.
Lease Name Fanshier Well No. 1 Kansas
Office Address 1008 Douglas Bldg. 104 So. Broadway Wichita,
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Aug. 18 19 77
Application for plugging filed Aug. 18 19 77
Application for plugging approved Aug. 18 19 77
Plugging commenced Aug. 18 19 77
Plugging completed Aug. 18 19 77
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3710 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	218	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug 480' w/40 sx.
2nd plug 200' w/20 sx.
3rd plug 40' w/10 sx.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Woodman & Lannitti Drilling Company
Address 1008 Douglas Building, 104 So. Broadway

STATE OF KANSAS COUNTY OF SEDGWICK SS.
K. T. Woodman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) K. T. Woodman
1008 Douglas Bldg., 104 So. Broadway
(Address)

Subscribed and sworn to before me this 23rd day of August 19 77

My commission expires Feb. 11, 1980
Justina Chamberlain Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

AUG 29 1977

CONSERVATION DIVISION
Wichita, Kansas

K. T. WOODMAN
 RES. PHONE 733-0418
 OFF. PHONE 265-7650
 WICHITA, KANSAS

D. J. IANNITTI
 PHONE 792-2921
 GREAT BEND, KANSAS

WOODMAN & IANNITTI DRILLING COMPANY
Rotary Drilling Contractors

1008 DOUGLAS BUILDING
 104 S. BROADWAY
 WICHITA, KANSAS 67202

August 22, 1977

Company;	Woodman & Iannitti Drilling Co.
Farm;	Fanshier #1
Location;	SW NE NE
Section;	20-21-13W
County;	Stafford
Contractor;	Woodman & Iannitti Drilling Co.
Comm;	August 10, 1977
Compl;	August 18, 1977
Total Depth;	3710'
Casing;	8 5/8 218 w/225 sx.
Production;	D & A

Figures Indicate Bottom Of Formations:

50	Surface soil & sand
60	Iron
100	Iron
105	Iron
112	Pyrite
221	Shale
375	Shale
785	Red Bed
810	Anhy
1115	Red Bed
1675	Shale
2325	Shale & Lime
2560	Shale & Lime
2902	Lime
3230	Lime
3525	Lime
3682	Lime
3710	Lime

I certify the above to be a true and correct copy of the driller's log to the best of my knowledge and belief.

Woodman & Iannitti Drilling Co.

K. T. Woodman
 K. T. WOODMAN RECEIVED
 STATE CORPORATION COMMISSION

AUG 29 1977

CONSERVATION DIVISION
 Wichita, Kansas