


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

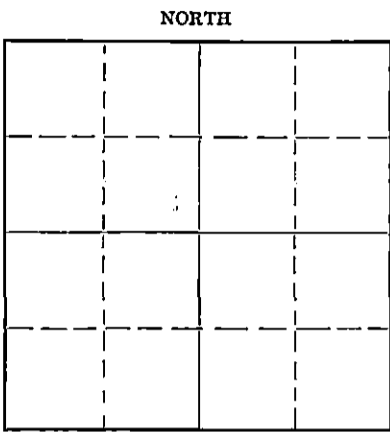

Stafford County. Sec. 2 Twp. 21 Rge. 13 XX (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SWc SW NE $\frac{1}{4}$
Lease Owner Armer Drilling Company, Inc.
Lease Name Address "C" Well No. 1
Office Address 710 Petroleum Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed Sept. 3 1949
Application for plugging filed Dec. 1 1949
Application for plugging approved Dec. 1 1949
Plugging commenced Dec. 1 1949
Plugging completed Dec. 8 1949
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Arbuckle Depth to top 3502 Bottom 3597 Total Depth of Well 3597 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8	200	none
Arbuckle	dry	3502	3597	5 1/2	3503	1823

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back to 3500 ft. with chat and dumped 5 sacks cement at 3500 ft.
Shot off & pulled 5 1/2" casing. Filled with mud to 200 ft, set rack bridge
and 15 sacks cement at 200 ft. Filled with mud to 30 ft., set bridge and
10 sacks cement at surface.


RECEIVED
JAN 27 1950 1-27-50
ST. ...

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Armer Drilling Company, Inc.
Address 710 Petroleum Bldg., Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
L. C. Sponenberg (employee of owner) or (knowledgeable person) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God: ARMER DRILLING COMPANY, INC.
(Signature) By L. C. Sponenberg
710 Petroleum Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of January, 1950.
Hazel Walton Notary Public.

My commission expires Sept. 17, 1951



LOG

OWNER: Armer Drilling Company et al
 CONTRACTOR: Armer Drilling Company, Inc.
 DRILLING COMMENCED: 8/14/49
 DRILLING COMPLETED: 8/26/49
 ELEVATION: 1869 D.F.
 1866 Gr.
 (Rotary Rig #1)

FARM: Address C#1
 LOCATION: Sec SW NE 2-21-13,
 Stafford County, Kansas
 CASING RECORD: 8-5/8" set @ 200'
 cemented with 125 sacks cement
 5 1/2" set @ 3503 with
 75 sacks cement

(figures below indicate bottoms)

Surface clay & sand	100
Sand & shale	180
Shale & shells	200
Shale	275
Red bed	700
Anhydrite	725
Shale & shells	1030
Shale	1260
Salt	1300
Shale & shells	1480
Shale, shells & sand	1520
Lime	1620
Lime & shale	1715
Lime	1750
Lime & shale	2420
Shale & shells	2550
Shale & lime	2850
Broken lime	2900
Lime	2905
Lime & shale	3170
Lime	3217
Shale & lime	3270
Lime	3447
Lime & shale	3497
Lime	3511
Total Depth - rotary	3511

TOPS:	
Heebner	3119
Kansas City	3259
Simpson shale	3499
Arbuckle	3502

RECORDED
 JAN 27 1950
 STATE OF KANSAS

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

ARMER DRILLING COMPANY, INC.

BY L. P. Sproudy

STATE OF KANSAS)
)
 COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a notary public, in and for said County and State this 30th day of August, 1949.

W. H. Daulton
 Notary Public

My commission expires Sept. 17, 1951

PLUGGING
 FILE SEC 2 T 21 R 13e
 BOOK PAGE 179 LINE 17