

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stafford County, Sec. 2 Twp. 21S Rge. 13W (E) (W)

Location as "NE/CNW%SW%" or footage from lines N $\frac{1}{2}$ N $\frac{1}{2}$ NE $\frac{1}{4}$

Lease Owner ALPINE OIL & ROYALTY CO., INC.

Lease Name ADDRESS Well No. 1

Office Address 800 Bitting Building, Wichita, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed February 9, 1961 19

Application for plugging filed February 9, 1961 19

Application for plugging approved February 9, 1961 19


Plugging commenced February 9, 1961 19

Plugging completed February 9, 1961 @ 3:00 P.M. 19

Reason for abandonment of well or producing formation non-productive in commercial quantities

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

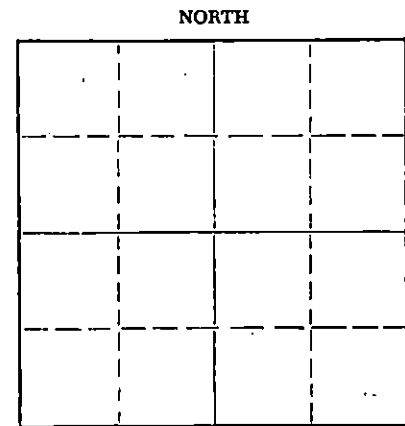

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3588 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	270	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud from total depth - 3588 feet to 240 feet solid plug and 20 sacks cement through drill pipe mud to 40 feet another plug and 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION

MAR 26 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Quaker Drilling Co., Inc.

Address 800 Bitting Building, Wichita, Ks.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Thomas M. McCaul (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Thomas M. McCaul

800 Bitting Building, Wichita, Ks. (Address)

SUBSCRIBED AND SWORN TO before me this 15th day of February, 1961

My commission expires August 10, 1961

Notary Public.



WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: 1-31-61

Contractor: Quaker Drilling Co., Inc.

Completed: 2-9-61

Address No. 1
 $N\frac{1}{2}$ $N\frac{1}{2}$ $NE\frac{1}{4}$ Sec. 2-21S-13W
 Stafford County, Kansas

Elevation: 1868 K.B.

Casing Record

8 5/8 inch casing set at 270 feet with 250 sacks cement

(Figures Indicate the Bottom of the Formations)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Sand	220	Heebner	3106 -1238
Shale	270	Brown Lime	3229 -1361
Red Bed, Shale & Sand	697	Lansing	3244 -1376
Anhydrite	720	Base of Kansas City	3473 -1605
Red Bed	1000	Conglomerate	3486 -1618
Shale and Shells	1450	Arbuckle	3505 -1637
Sandy Lime and Shale	1680	Rotary Total Depth	3588 -1720
Lime and Shale	2215		
Shale	2375		
Shale and Shells	2600		
Shale and Lime	2745		
Shale	2840		
Lime and Shale	3588		

RECEIVED
 STATE CORPORATION COMMISSION

MAR 26 1963

CONSERVATION DIVISION
 Wichita, Kansas

We hereby certify the foregoing to be a true and correct copy of the driller's log of the well drilled in the $N\frac{1}{2}$ $N\frac{1}{2}$ $NE\frac{1}{4}$ Section 2, Township 21 South, Range 13 West, Stafford County, Kansas.

QUAKER DRILLING CO., INC.

By:

Thomas M. McCaul
 Thomas M. McCaul, President

SUBSCRIBED AND SWORN to before me this 15th day of February, 1961.

Virginia Mundell
 Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:
 August 10, 1961