


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County, Sec. 2 Twp. 21 Rge. 12 E/W  
Location as "NE/CNW/SW" or footage from lines  
~~XXXXXXXXXXXXXX~~ C S/2 N/2 NW

Lease Owner D. R. Lauck Oil Co.  
Lease Name Hewitt Est. #1 Well No. \_\_\_\_\_  
Office Address Ellinwood, Kansas 67526  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

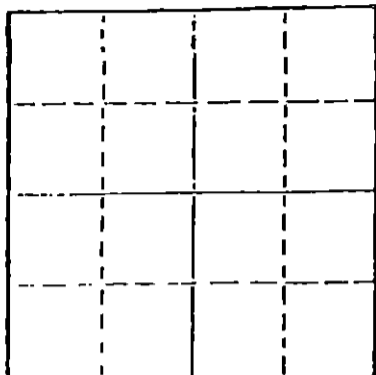

Locate well correctly on above  
Section Plat

Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 4/8/77 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 4/12/77 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation  
depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Metz  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3485  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	338	none
				5 1/2	3484	2907

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded to 3425' and ran 5 sacks cement. Shot pipe at 2920', 2892', pulled 91 joints.  
Plugged with 4 sacks hulls, 20 sacks gel and 100 sacks common cement, 6% gel.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION

4-19-1977  
APR 19 1977

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of April, 19 77

Margaret Melcher  
Notary Public.

My commission expires



15.185.20712.0000

D. R. Lauck Oil Company, Inc. - Hewitt Estate #1  
C S/2 N/2 NW Sec. 2-21S-12W  
Stafford County, Kansas

Contractor: D. R. Lauck Oil Company, Inc.  
301 S. Broadway  
Wichita, Kansas 67202

Commenced: March 2, 1977  
Completed: March 11, 1977

Drillers Log

Sand	225
Shale	623
Anhydrite	631
Shale & Shells	1275
Shale	1440
Shale & Shells	1915
Shale & Lime	2535
Lime & Shale	3020
Lime	3100
Shale & Lime	3215
Lime	3485 RTD

MAR 30 1977

Wichita, Kansas