


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

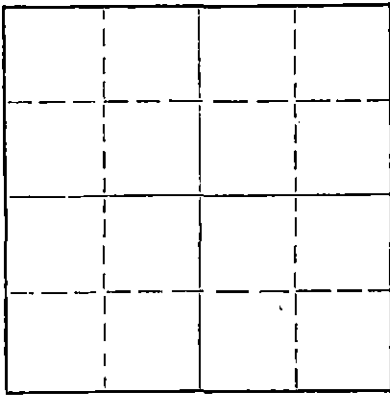

Locate well correctly on above
Section Plat

Pawnee County. Sec. 6 Twp. 21 Rge. 15 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines SE SE NE
Lease Owner Davis Mud Company
Lease Name Morris Well No. "A" 1
Office Address Box 523, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced June 16, 1962 19____
Plugging completed June 19, 1962 19____
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Lacamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3851 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	971	
				5 1/2	3865	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole back to 3820. Dumped
5 sacks of cement. Shot pipe at
3309' and 3218', and pulled pipe.
Bridged hole @ 300' with 10
rock bridge. Dumped 25 sacks cement.
Filled hole with mud to 30' and dumped 10
sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

AUG 21 1962

CONSERVATION DIVISION
Wichita, Kansas

8-21-1962

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pipe Pullers, Inc.
Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Pipe Pullers, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

(Address)

SUBSCRIBED AND SWORN TO before me this 30 day of June, 19 62

My commission expires December 18, 1962

Notary Public.

COPY


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- GRAHAM-MESSMAN-RINEHART OIL COMPANY
Farm- Morris "A" No. 1

SEC. 6 T. 21 R. 15W
SE SE NE

Total Depth. 3865
Comm. 12-5-54 Comp. 12-15-54
Shot or Treated.
Contractor. G-M-R Oil Co.
Issued. 3-26-55

County Pawnee
KANSAS



CASING:
8 5/8" 971' cem w/400 sx
5 1/2" 3865' cem w/ 75 sx

Elevation. 1965 KB

Production. 2,300,000 gas.

Figures indicate Bottom of Formations

clay, shale	358
sand	503
shale, lime	865
shale, shells	961
anhydrite	992
shale	1331
shale, shells	1701
Fort Riley	1814
lime	1925
lime, shale	2425
shale	2675
shale, lime	3061
lime	3705
lime, chert	3740
lime	3865
Total Depth	RTD

RECEIVED
STATE CORPORATION COMMISSION

AUG 22 1962

CONSERVATION DIVISION
Wichita, Kansas

Tops: Sample
Heebner 3324
Brown Lime 3420
Lansing 3430
Shaley Congl. 3702
Viola 3730
Simpson 3744
Arbuckle 3776