


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County. Sec. 27 Twp. 21S Rge. 14W ~~22W~~  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines  
100' E & 100' S of SE NW SW  
Lease Owner Francis Oil & Gas, Inc.  
Lease Name Keenan "B" Well No. 1  
Office Address 4120 East 51st. Street, Tulsa, Okla.  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

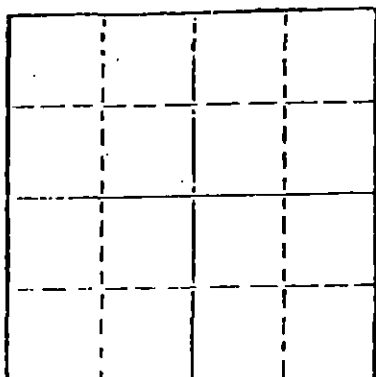

Locate well correctly on above  
Section Plot

Date Well completed May 4, 1977  
Application for plugging filed Verbal Application 19  
Application for plugging approved Verbal Approval 19  
Plugging commenced May 4, 1977  
Plugging completed May 4, 1977  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Buddy Metz  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3764'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS, OR WATER RECORDS 5-11-77

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
1977				8-5/8"	287'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 3,764 ft. (rotary total depth) to 250 ft. Set plug at 250 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 250 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 2 sacks cement in rat hole.

Plugging operations accomplished utilizing Sun Oil Well cementing pump truck through 4-1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Sun Oil Well Cementing Co.  
Box 169, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent ~~employee of owner~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 10th. day of May, 19 77



Elsie Willison  
Elsie Willison - Notary Public.

My commission expires June 30, 1978

KANSAS GEOLOGICAL SOCIETY API # - 15-185-20,724.0000  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Francis Oil & Gas, Inc.


SEC. 27 T. 21S R. 14W  
 LOC. 100' E & 100' S of  
 SE NW SW

FARM Keenan "B" NO. 1

COUNTY Stafford

TOTAL DEPTH 3,764'  
 COMM. April 27, 1977  
 SHOT OR TREATED  
 CONTRACTOR H-30, Inc.  
 ISSUED May 10, 1977

COMP. May 4, 1977



CASING  
 20 10  
 15 8 -5/8" 287' cemented w/250 sxs cement  
 12 6  
 13 5

PRODUCTION

ELEVATION 1,942 K.B.

	FIGURES INDICATE BOTTOM OF FORMATIONS
Sand and Shale	292'
Sand	360'
Shale	1,785'
Shale and Lime	2,170'
Lime and Shale	3,559'
Lime	3,764'
Rotary Total Depth	3,764'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

RECEIVED  
 STATE CORPORATION COMMISSION

H-30, INC.

MAY 11 1977


CONSERVATION DIVISION  
 Wichita, Kansas

*Dean Britting*  
 Dean Britting

State of Kansas }  
 County of Sedgwick }

Subscribed and Sworn to before me a Notary Public in and for said county and state this 10th. day

WILLISON, May, 1977.



*Elsie Willison*  
 Elsie Willison - Notary Public

Notary Commission Expires:  
 June 30, 1978