

15-009 -15811-00-00

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 48-12LOCATION 27W-SW-SESEC. 27 TWP. 16 RGE. 12-WDry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease McLaughlinOperator Hovaker Drilling Co Address McBride Bldg. 4 Bond HouseField _____ County BartonTotal Depth 3384 Feet.

(Describe briefly the manner in which the well was plugged)

Surfaced Pipe 8 1/2" - 261 ft. Circulated with cement.
5 1/2" casing at 3364 ft. Cemented with 150 sacks cement.
Lance Well Plug at 3103 ft. Filled hole with shot from
3103 ft. to 3080 ft. Dumped 5 sacks of cement at 3080 ft.
Shot off & pulled the 5 1/2" casing - Went to 261 ft. Set Rock
Bridge & 15 sacks of cement at 261 ft. Went to 30 ft.
Plug & 10 sacks cement at the surface.
Went casing pulling & plugging the tractor.

RECEIVED
STATE CORPORATION COMMISSION 1-11-51

PLUGGING
FILE CONSERVATION DIVISION
Wichita, Kansas
BOOK PAGE 47 LINE 12

C. W. Stouck
District Conservation Agent

Date 1-9-51

15-009-15811-00-00

HONAKER DRILLING CO., INC.

ROTARY DRILLING CONTRACTORS

TELEPHONE 5598

2008 LAKIN

MCBRIDE BUILDING

GREAT BEND, KANSAS

December 11, 1950

State Corporation Commission
Conservation Division
800 Bitting Bldg.
Wichita, Kansas

McLaughlin #1

T. D. 3365


Lane-Wells Plug set @ 3291'
Lane-Wells Plug set @ 3150'
Lane-Wells Plug set @ 3103'

12 Holes Perforated @ 3092 to 3096'

Only holes that are open at present.

Honaker Drilling Co., Inc.

By *E. O. Stinson*

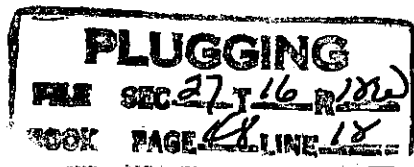

RECEIVED
STATE CORPORATION COMMISSION

DEC 12 1950

CONSERVATION DIVISION
Wichita, Kansas