


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 4 Twp. 23 Rge. 17 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SW SW
Lease Owner The Bovaird Supply Company
Lease Name Welch Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 3-30-65 _____ 19____
Plugging completed 4-12-65 _____ 19____
Reason for abandonment of well or producing formation Depleted.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH



Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4321 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	226'	None
				5-1/2"	4319'	3266'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 4260', sanded hole to 4230' and dumped 4 sacks of cement @ 4230' with dump bailer. Pulled 5 1/2" casing and pumped in 40 sacks of gel mud. Pumped in 95 sacks of cement and capped well with 5 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

APR 23 1965

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

4-23-65

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Noel J. Knight

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 15th day of April, 1965

Milton J. Volin

Notary Public.

My commission expires May 20, 1968

R. H. SIEGFRIED COMPANY

Welch #1
NW SW SW Sec. 4-23S-17W
Pawnee County, Kansas

Casing Records:
8 5/8" @ 226' w/200 sx
5 1/2" @ 4319' w/150 sx

Commenced: November 26, 1954
Completed: December 13, 1954

Elevation: 2067 R.B.

15-145-61167-0000

LOG

Shale & shells	0-226
Shale & red beds	226-550
Sand	550-650
Red Beds & sand streaks	650-1085
Anhydrite	1085-1115
Shale	1115-1250
Red Beds, shale & shells	1250-1355
Shale, shells & lime streaks	1355-1590
Shale & lime streaks	1590-1890
Shale & lime	1890-2025
Lime & shale	2025-2165
Shale & lime	2165-2265
Lime & shale	2265-2730
Shale	2730-2775
Shale & lime streaks	2775-2895
Shale & lime	2895-3155
Lime & shale	3155-3440
Shale & lime	3440-3490
Lime & shale	3490-3545
Lime	3545-3700
Shale, lime & chert	3700-3741
Lime	3741-4106
Lime & shale	4106-4151
Conglomerate	4151-4202
Mississippian	4202-4215
Miss. chert	4215-4226
Mississippian	4226-4262
Conglomerate	4262-4280
Chert	4280-4321 R.T.D.

RECEIVED
STATE CORPORATION COMMISSION


APR 6 1965

CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that this log is true and correct to the best of my knowledge and belief.

JAYHAWK DRILLING CO., INC.

By

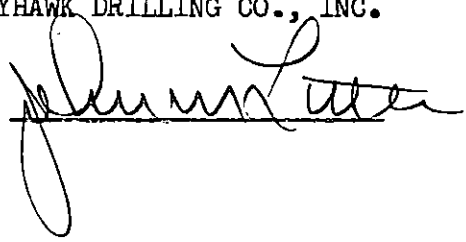

Sworn and subscribed to before me
this 10 day of December, 1954.

Allen P. Denton
Notary Public

My commission expires August 13, 1957