


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 4 Twp. 23 Rge. (E) 17 (W)

Location as "NE/CNW/SW" or footage from lines SE SE NE
Lease Owner Clark Knight
Lease Name Ewing Well No. 2
Office Address Box 969 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 19
Application for plugging filed 10-29 19 62
Application for plugging approved 19
Plugging commenced 11-1 19 62
Plugging completed 11-6 19 62
Reason for abandonment of well or producing formation

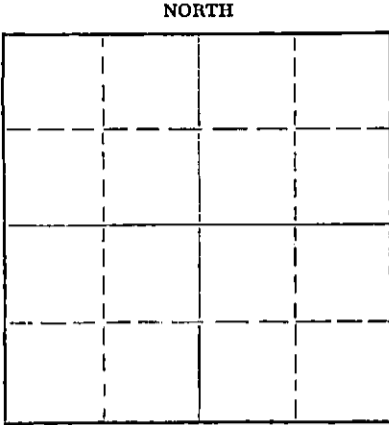

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Jackamp Jr.
Producing formation Depth to top Bottom Total Depth of Well 4260 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	215	none
				5 1/2	4259	3415'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Top Perforation 4158

Sanded hole to 4145' - dumped 5 sks cement - pulled casing - pumped in 10 sks mud and 75 sks cement.

RECEIVED
STATE CORPORATION COMMISSION

MAR 1 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Co. License #236
Address Box 572, Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.
J. W. Railsback (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. W. Railsback
Box 572, Hutchinson, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 15th day of November, 19 62

Wilma A. Clark
Notary Public.

My commission expires Nov. 16, 1965



WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
502 East Murdock, Wichita, Kansas


15-445-01160-0000

Company- CLARK KNIGHT DRIG. CO.
Farm- EWing No. 2

SEC. 4 T. 23 R. 17W
SE SE NE

Total Depth. 4260'
Comm. 3-22-55 Comp. 4-5-55
Shot or Treated.
Contractor.
Issued. 7-28-56

County Pawnee
KANSAS



Elevation. 2061' RB

Production. 504 BO

Figures indicate Bottom of Formations.

shale, shells	215
shale, shells	410
sand, shale	435
shale, shells	535
sand	630
shale, shells	1085
anhydrite	1110
shale, shells	1965
lime	2090
lime, shale	2255
lime	2350
lime, shale	3495
lime	3614
lime, shale	3678
lime	4120
coring	4151
reaming conglomerate	4151
Conglomerate	4260
Total Depth	

Tops: Scout	
Anhydrite	1085
Heebner	3590
Lansing	3706
Cherokee	4123
Conglomerate	4142
Mississippi	4205
Viola	4250

Ran Lane Wells

RECEIVED
STATE CORPORATION COMMISSION

MAR 1 1963

CONSERVATION DIVISION
Wichita, Kansas