

15-009-20384-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

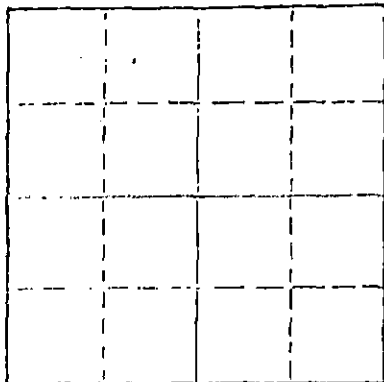

Locate well correctly on above
Section Plat

Barton County, Sec. 36 Twp. 16 Rge. 11 (E) (W)
Location as "NE/CNW/SW" or footage from lines CN/2 SE NE
Lease Owner Joe Brougher Oil Co.
Lease Name Alden A#2 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10/21/74 _____ 19____
Plugging completed 11/21/74 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3369 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	300	none
				5 1/2"	3364	2410'
RECEIVED STATE CORPORATION COMMISSION DEC 23 1974 CONSERVATION DIVISION						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sand bridged at 949', tried to knock bridge out with no luck. Tried to sand pump, no luck, used set of jars to drive bridge down. Shot pipe at 2415', pulled 75 joints. Pumped 25 sacks mud, 100 sacks cement with 4% gel.

PLUGGING COMPLETE.

Name of Plugging Contractor KELSO CASING PULLING CO
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

Subscribed and Sworn to before me this 5th day of December, 19 74

My commission expires _____
MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melcher
Notary Public.

15-009-20384-0000

JOE BROUGHER OIL COMPANY

Mailing Address:

P. O. Drawer I367

5513 APACHE
GREAT BEND, KANSAS 67530
PHONE 793-8508

September 5, 1974

KELSO CASING PULLING
Box I76
Chase, Kansas 67524

Attention: Mr. Darrell Kelso

Re: ALDEN A-2
CN/2 SE NE Sec.36-I6-IIW
Barton County, Kansas

Information for Pulling Casing on the above captioned well:

LOG TOPS:

Topeka	2633- 735
Heebner	2925-I027
Toronto	2944-I046
Douglas	2957-I059
Brown Lime	3028-II30
Lansing	3044-II46
Base Kansas City	3294-I396
Conglomerate	3334-I436
Arbuckle	3365-I467
TD	3369-I47I

RECEIVED
STATE CORPORATION COMMISSION
SEP 12 1974
CONSERVATION DIVISION
Wichita, Kansas

Top Perforations 3197' to 3202'.

3364.04' of 5½" Casing cemented with I50 sacks cement.