


DISTRICT CONSERVATION AGENT'S REPORT

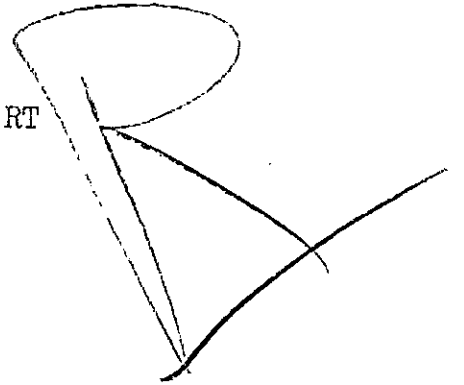

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 86-10

LOCATION C214-SE-ME

SEC. 17 TWP. 21 RGE. 11-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 2 Lease Smith 'A'

Operator Champion Refining Co Address Box # 169 - Elliswood - Kans.

Field _____ County Stafford

Total Depth 3425 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/4 - 365 ft - Circulated with cement
4 1/2 casing at 3389 ft - Plugged back from bottom
to 3385 ft with cement - Mixed 4 sacks of cement at 3385 ft
Shot off & Pelled the 4 1/2 casing - Filled with mud to 360 ft
Set Rock Bridge & 15 sacks of cement at 350 ft - Mud to
30 ft - Plus 2 10 sacks of cement at the surface -
Waggett & Lynch - Plugging Contractors

C. N. Stouch
District Conservation Agent
Date 3-25-49
MARCH 29 1949
COMMISSION
KANSAS
3-29-49

