

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-20838-00-00
Spot: NESW Sec/Twnshp/Rge: 21-33S-6W
1980 feet from S Section Line, 1980 feet from W Section Line
Lease Name: HARRISON Well #: 2
County: HARPER Total Vertical Depth: 4502 feet

Operator License No.: 34192
Op Name: SANDRIDGE EXPLORATION AND PRO
Address: 123 ROBERT S. KERR AVE
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4499		300 SX
SURF	8.625	249		175 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/01/2017 12:00 AM
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.
Proposal Rcvd. from: RONNIE ORR Company: ORR ENTERPRISES, INC. Phone: (405) 429-6165

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON Witness Type: PARTIAL
Date/Time Plugging Completed: 08/02/2017 6:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

Perfs:


SET CIBP @ 4395', CIRC 70 BBLs MUD, SPOT 10 SKS CEMENT. RECOVERED 1534' OF 4 1/2" CASING. TIH WITH TUBING TO 1150', SPOT 35 SX CEMENT. PULL TUBING TO 700' & SPOT 35 SX CEMENT. PULLED TUBING TO 300' & CIRCULATED CEMENT TO SURFACE WITH 85 SX CEMENT.

Remarks: ORR ENTERPRISES, CLASS C CEMENT.

Plugged through: TBG

District: 02

Signed _____

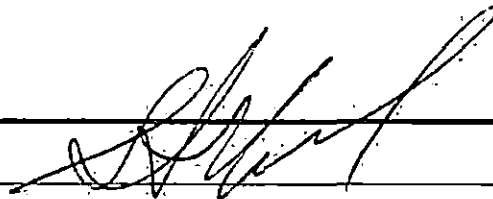

(TECHNICIAN)

INVOICED
AUG 29 2017

SK