


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Trego County, Sec. 20 Twp. 14S Rge. (E) 24 (W)

Location as "NE/CNW&SW&" or footage from lines C NE NE  
Lease Owner Pickrell Drilling Company  
Lease Name Gaither "A" Well No. 1  
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed October 14, 19 66  
Application for plugging filed October 14, 19 66  
Application for plugging approved October 14, 19 66  
Plugging commenced October 14, 19 66  
Plugging completed October 14, 19 66  
Reason for abandonment of well or producing formation Dry Hole

NORTH

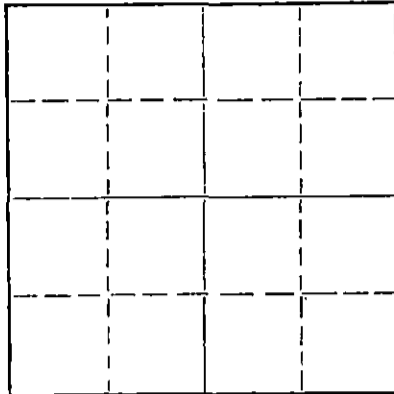

Locate well correctly on above  
Section Plat


If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols, Moreland, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4310 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	245'	None



Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy mud to 600'. Set plug. Cemented with  
25 sacks cement. Heavy mud to 240'. Set plug.  
Cemented with 25 sacks cement. Heavy mud to 40'.  
Set plug. Cemented with 10 sacks cement to bottom  
of cellar. Plugged rat hole with 2 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company  
Address 705 Fourth National Bank Bldg., Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
G. W. Sebitts (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Sebitts  
705 Fourth National Bank Bldg, Wichita, Kansas  
(Address)

Subscribed and sworn to before me this 18th day of October, 19 66

L. M. Whiting  
L. M. Whiting Notary Public.



My commission expires May 10, 1970

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company.  
705 Fourth National Bank Bldg.  
Wichita, Kansas

Rotary Drilling Commenced 10/2/66

Rotary Drilling Completed 10/14/66

LOCATION: Gaither "A" No. 1  
C NE NE Section 20-14S-24W  
Trego, County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**  
Wichita, Kansas

CASING RECORD: (12 Jts) 8 5/8" surface casing set at 245' with 170 sacks cement. Circulated. Completed at 9:00 PM October 3, 1966. No oil string was run. D. & A. October 10/14/66.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

1560	Shale & Shells	<u>C. F. S.</u>
1825	Anhydrite & Shale	3749
1940	Shale	3843
3683	Lime & Shale	4128
3730	Lime	4137
3795	Kansas City	4170
4130	Lime & Shale	4182
4225	Lime	4192
4260	Mississippian	4200
4310	Mississippian Chert & Lime, RTD	4210
		4225
		4234
		4245
		4260
		4310

Slope Tests

2500
3000
3500
4000

S. L. M.

3721
------

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 21 1966  
CONSERVATION DIVISION  
Wichita, Kansas

The undersigned, G. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By G. W. Sebits  
G. W. SEBITS, Attorney-in-Fact

STATE OF KANSAS }  
COUNTY OF SEDGWICK } ss.:

On this 18th day of October, 19 66, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared G. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: May 10, 1970

L. M. Whiting  
L. M. Whiting, Notary Public