


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

WELL PLUGGING RECORD

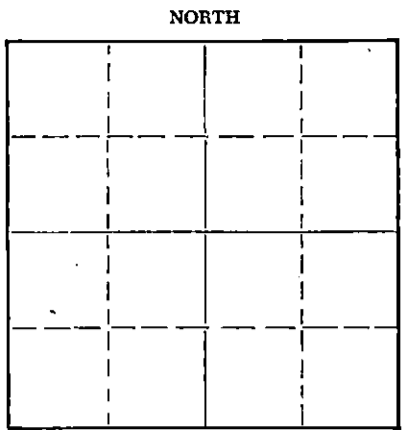

Locate well correctly on above  
Section Plat

Trego County, Sec. 21 Twp. 11 Rge. (E) 22 (W)  
Location as "NE/CNW/SW" or footage from lines NE NE SE  
Lease Owner Petroleum, Inc.  
Lease Name SCOTT 'I' Well No. 1  
Office Address 311 East Third, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed November 12 19 55  
Application for plugging filed November 12 19 55  
Application for plugging approved November 12 19 55  
Plugging commenced November 12 19 55  
Plugging completed November 12 19 55  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty, Hays, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 4021 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up to 235', set wooden plug followed by 1/2 sack hulls, and 15 sacks cement displaced through drill pipe. Mudded up to 35', set second wooden plug followed by 1/2 sack hulls and 10 sacks cement filling hole to base of well cellar.

Conservation Division  
1955 11-30-55  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Garvey Drilling Company  
Address R. R. #2 - Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Karl E. Becker (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Karl E. Becker  
311 East Third, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 11th day of November, 19 55

My commission expires September 2, 1959  
Frances Sloan Notary Public.

PLUGGING  
FILE SEC. 21 TWP. 11 R. 22 W  
BOOK PAGE 12 LINE 22

FRANCES SLOAN, Notary Public  
My Commission expires Sept. 2, 1959

# WELL LOG

COMPANY **Petroleum, Inc.**

SEC. 21 T. 11S R. 22W

FARM **SCOTT #1** NO. 1


LOC. **NE NE SE**  
**330' FEL**  
**2310' FSL**

TOTAL DEPTH **4021**

COUNTY **Trego**

COMM. **November 1, 1955** COMP. **November 12, 1955**

CONTRACTOR **Garvey Drilling Company**



CASING **8-5/8" @ 240' w/150 sax**

ELEVATION **2305' DF**  
**2308' RB**

PRODUCTION **D & A**


FIGURES INDICATE BOTTOM OF FORMATIONS.

195	Clay & Sand
240	Blue Shale
681	Sand & Shale
985	Sandy Shale & Shells
1050	Hard Sand & Pyrite
1515	Sand & Shale
1560	Anhydrite
1790	Shale & Shells
2000	Sand & Shale
2435	Shale & Shells
2597	Shale
3695	Lime & Shale
3798	Lime
3875	Lime & Shale
3919	Lime
3955	Lime & Chert
4001	Shale, Lime & Chert
4021	Lime

### Sample Tops

Topeka:	3330 (-1022)
Heebner:	3541 (-1233)
Toronto:	3563 (-1255)
Lansing:	3582 (-1274)
Base K C:	3826 (-1518)
Marmaton Chert:	3902 (-1594)
Conglomerate:	3967 (-1659)
Arbuckle:	3996 (-1688)

R.F.D. 4021



State of KANSAS  
County of SEDGWICK

SS:

I, Karl E. Becker of Petroleum, Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the SCOTT #1 #1 well

**FILED**  
**SEC 21 T 11S R 22W**  
**BOOK PAGE 17 LINE 22**

*Karl E. Becker*

Subscribed and sworn to before me this 25th day of November 19 55

My Commission Expires: September 2, 1959

*Frances Sloan*  
NOTARY PUBLIC

FRANCES SLOAN, Notary Public  
My Commission expires Sept. 2, 1959