


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

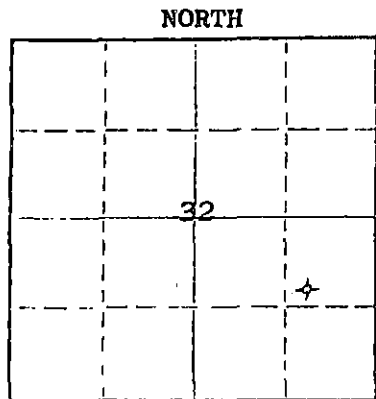

Locate well correctly on above Section Plot

Barton County. Sec. 32 Twp. 16S Rge. 12W (X) (W)
Location as "NE/CNWxSWx" or footage from lines SW NE SE
Lease Owner D. R. Lauck Oil Company, Inc.
Lease Name Shepardson Well No. 1
Office Address 301 S. Broadway, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 30, 1977
Application for plugging filed April 30, 1977
Application for plugging approved April 30, 1977
Plugging commenced April 30, 1977
Plugging completed April 30, 1977
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 10
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane L. Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3425 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0'	247'	8-5/8"	240.17'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Spotted with 40 sacks cement & plug at 500',
20 sacks and plug at 250', 10 sacks and
plug at 40'.

RECEIVED
STATE CORPORATION COMMISSION
MAY 12 1977

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allied Cementing Company CONSERVATION DIVISION
Address Great Bend, Kansas Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
John D. Knightley (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
301 S. Broadway, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of May, 1977

My commission expires March 12, 1979 [Signature] Notary Public.

15-009-21163-00-00

D. R. Lauck Oil Company, Inc. - Shepardson #1
SW NE SE Sec. 32-16S-12W
Barton County, Kansas

Contractor: D. R. Lauck Oil Company, Inc.
301 S. Broadway
Wichita, Kansas 67202

Commenced: April 24, 1977
Completed: April 30, 1977

Drillers Log

Shale	320
Sand	439
Shale & Shells	810
Anhydrite	842
Shale & Shells	1435
Shale	1720
Lime & Shale	2925
Shale & Lime	3190
Lime & Shale	3295
Lime	3425 RTD

RECEIVED
STATE CORPORATION COMMISSION

MAY 12 1977

CONSERVATION DIVISION
Wichita, Kansas