

CONTRACTOR'S WELL LOG

Operator Musgrove Pet. Corp. Inc., FARM NAME Growth
 LOCATION E/2 of NW/4 of Sec. 28 TWP 21S Rge 12W
 Pool Name _____ County Stafford STATE Kansas
 COMMENCEMENT DATE 7/2/50 COMPLETION DATE & 7/14/50

LOG OF WELL

* All measurements from top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS
0	160	Sand-clay		
160	200	Shale-shells		
200	243	Red bed shale shells		
243	665	red bed	1/2°-262'	
665	685	Anhydrite	0° 504'	
685	1170	shale shells	3/4° 1049'	
1170	1320	Salt		
1320	1480	shale shells		
1480	1760	Lime	1/2°-1506'	
1760	1950	shale shells		
1950	2027	shale lime shells		
2027	2110	lime shale	1/2°-2029'	
2110	2175	shale-shells red bed		
2175	2445	shale-shells		
2445	2570	shale		
2570	2655	shale shells		
2655	2825	lime shale	1/2° 2719'	
2825	3190	Lime		
3190	3230	lime shale		
3230	3530	lime		
3530	3553	Chert		
3553	3605	shale		
3605	3616	lime-shale		
3616	3660	lime		
Total Depth		DRY HOLE		

Set 247.65' of 8 5/8" (12 jts)

State of Kansas)
 SS
 County of Rice)

The undersigned certifies that to the best of his knowledge and belief the above facts are true and correct.


STAG DRILLING INC.

by *E. L. Dymall*
 President

Subscribed and sworn to before me this 18th day of July, 1950

My Commission Expires 3/1/51

Orlando Miller
 Notary Public

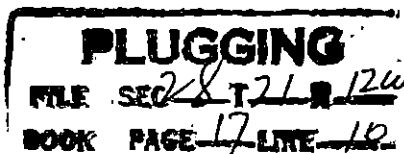

JUL 22 1950
 STAG DRILLING INC.
 COUNCIL BLUFFS
 KANSAS