
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

INV. NO.

Intent to Drill, filed February 23, 1967.

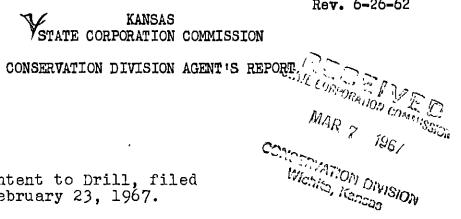

Spanston's Rull None Tou Pag Sil Sompony Tro
Operator's Full Name Jay-Bee Oil Company, Inc.
Complete Address: 515 Union Center Bldg., Wichita, Kansas
Lease Name Grow Well No. # 1
Location <u>NE NW NW</u> <u>Sec. 28 Twp. 21 Rge. 12 (E) (W) W</u>
County Stafford Total Depth 36781
Abandoned Oil Well Gas Well Input Well SWD Well D & A X
Other well as hereafter indicated:
Plugging Contractor: Sage Drilling Company, Inc.
Address: 500 Bitting Bldg., Wichita, Kansas License No.
Operation Completed: Hour 4:45PM Day 4th Month Merch Year 1967
The Above well was plugged as follows:
288' of 8 5/8" surface pipe, cement circulated. Fluid level in the hole
was at 122. 1st cementing plug and $\frac{1}{4}$ sack of hulls was pushed in fluid
to 280', and cemented with 25 sacks, through the drill pipe at 280'.
Hole was filled with drilling mud to 40', 2nd cementing plug, bridged
with 1 sack of dry cement and 1 sack of hulls on fluid at 40, and
cemented with 9 sacks to the base of the cellar. Rat hole bridged and
cemented with 2 sacks.
I hereby certify that the above well was plugged as herein stated.
Signed: Well Plugging Supervisor()