



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market

WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION
SEP 8 1971
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Hunt of Thunderbird has this
date requested permission to plug the following described well:

Mr. Hunt guarantees payment of the plugging fee.

Operator's full Name: Thunderbird Drlg. & Petroleum Resources

Complete Address: Box 18407, Wichita, Kansas

Lease Name: Nelson "A" Well No. 1

Location: NE NE Sec. 9 Twp. 21 Rge. 24 ~~(E)~~ (W)

County: Hodgeman Total Depth 4400' Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Hunt was instructed to plug the well as follows:

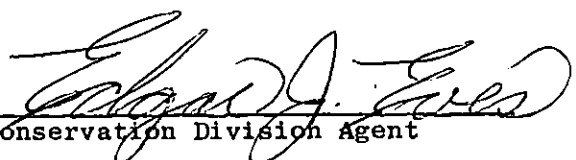
8 5/8" to 247' circulated w/ cement. Mud 4400' to 850'

Spot 80 sacks cement 850' to 550' Mud 550' to 247'

Spot 30 sacks cement 247' to 147' Mud 147' to 45'

Plug, Hulls & 15 sacks cement 45' to 0'.

Very truly yours,


Conservation Division Agent