

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
211 North Broadway
Wichita, Kansas

FILE NO. 85-25LOCATION NE-NE-NESEC. 33 TWP. 16 RGE. 12 WDry Hole _____ Abandoned Oil Well ☒ Abandoned Gas Well _____

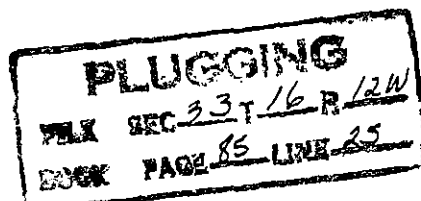
I have this date completed supervision of plugging of:

Well No. 1 Lease FingerOperator Trans. Era Petroleum, Inc. Address Russell Kans.Field _____ County BartonTotal Depth 3338 Feet.Plugging Contractor Miller Casing Pulling Co.Plugging Contractor's License No. 12Address Great Bend Kans.

(Describe briefly the manner in which the well was plugged)

Surface pipe 8 $\frac{3}{8}$ " @ 201' c.w.c. 5 $\frac{1}{2}$ " Oil string
@ 3326' set w/ 100 st cem. P.B. to 3175' top perf.
3133. Crushed rock to 3125' dump 5 st cem.
Shot off and pulled 5 $\frac{1}{2}$ " casing. Filled hole
with mud to 200' set rock bridge and
run 20 st cem. mud to 35' rock bridge and
10 st cem to base of cellar

Warren H. Horner
District Conservation Agent

Date Jan 11, 1955

1-13-1955