


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County. Sec. 24 Twp. 21S Rge. 12W ~~XXX~~  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
N/2 NW/4 NW/4

Lease Owner Icer Addis  
Lease Name Wilson Well No. 1  
Office Address P.O. Box 8038, Wichita, Kansas 67208  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

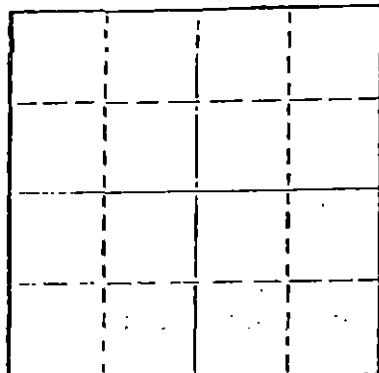

Locate well correctly on above  
Section Plat

Date Well completed August 16, 19 76  
Application for plugging filed Verbal Application 19 76  
Application for plugging approved Verbal Approval 19 76  
Plugging commenced August 16, 19 76  
Plugging completed August 16, 19 76  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,640'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	264'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 3,640 ft. (rotary total depth) to 250 ft. Set plug at 250 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 250 ft. to 40 ft. Set solid plug at 40 ft. and cemented with 15 sacks cement to cellar, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton ONE WELL COMMISSION Cementing pump truck through 4 1/2 inch drill pipe.

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 26 1976

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this ~~affidavit~~ Kansas

Name of Plugging Contractor Halliburton Services  
410 Union Center Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.

Dean Britting, Agent (Employee of owner) ~~or (Operator of owner)~~ of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 25th day of August, 19 76

June 30, 1978

Elsie Willison  
Elsie Willison Notary Public.



15.185.20677.0000

KANSAS GEOLOGICAL SOCIETY API NO. - 15-185-20,677  
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
KANSAS GEOLOGICAL SOCIETY BUILDING  
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Icer Addis

SEC. 24 T. 21S R. 12W  
LOC. N/2 NW/4 NW/4

FARM Wilson

NO. 1

COUNTY Stafford

TOTAL DEPTH 3,640'

COMM. August 9, 1976


COMP. August 16, 1976

KANSAS

BHPT OR TREATED

CONTRACTOR H-30, Inc.

ISSUED August 25, 1976



CASING

20	10		
15	8-5/8"	264'	cemented w/200 sxs cement ELEVATION 1,830 KB
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Shale	265'
Shale, Shells and Red Bed	608'
Anhydrite	622'
Shale	1,932'
Lime and Shale	2,373'
Shale and Lime	2,595'
Lime and Shale	3,070'
Lime	3,310'
Lime and Shale	3,370'
Lime	3,640'
Rotary Total Depth	3,640'

RECEIVED  
STATE CORPORATION COMMISSION

AUG 26 1976

CONSERVATION DIVISION  
Wichita, Kansas

I hereby certify the above and foregoing  
to be a true and correct log of the above  
described well as shown by the drilling  
reports.

H-30, INC.

*Dean Britting*  
Dean Britting

State of Kansas }  
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary  
Public in and for said county and state this  
25th. day of August, 1976.



*Elsie Willison*  
Elsie Willison - Notary Public

My Commission Expires:

June 30, 1978