


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

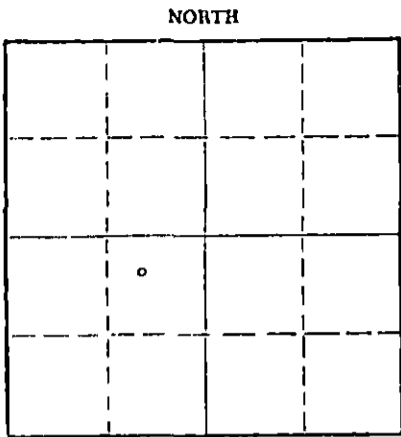

Locate well correctly on above  
Section Plat

Stafford County. Sec. 6 Twp. 21 Rgs. 12 (E) West (W)  
Location as "NE/CNWxSWx" or footage from lines NW NE SE  
Lease Owner The Duke Drilling Company, Inc.  
Lease Name LANTERMAN Well No. 1  
Office Address Box 823 - Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed April 30 19 68  
Application for plugging filed April 30 19 68  
Application for plugging approved " " 19 68  
Plugging commenced " " 19 68  
Plugging completed " " 19 68  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Warren  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3550 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 250'  
1/2 sack hulls, PLUG & 25 sacks cement  
Filled hole with heavy mud to 40'  
1/2 sack hulls, PLUG - good bridge & 10 sacks cement  
2 sacks cement in rat hole

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 2 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Larry Curtis (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Larry Curtis  
Box 823 - Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of May, 1968  
Maureen M. Hague  
Notary Public.

My commission expires 4-11-70

## W E L L L O G

DATE COMMENCED: April 20, 1968  
 DATE COMPLETED: April 30, 1968

Duke Drilling Company  
 LANTERMAN #1  
 NW/4 NE/4 SE/4  
 Section 6-T-21S-R12W  
 Stafford County, Kansas

0 - 245' Sand & Shale  
 245 - 674' Red Bed  
 674 - 694' ANHYDRITE  
 694 - 1140' Shale  
 1140 - 1469' Shale & Shells  
 1469 - 1840' Shale Lime  
 1840 - 2005' Lime Shale  
 2005 - 2615' Shale Lime  
 2615 - 3099' Lime  
 3099 - 3103' Shale  
 3103 - 3134' Lime Shale  
 3134 - 3225' Shale  
 3225 - 3244' Brown Lime  
 3244 - 3454' Lime  
 3454 - 3485' Shaly Conglomerate  
 3485 - 3500' Dolomite  
 3500 - 3519' Shale  
 3519 - 3543' Shale with Dolomite  
 3543 - 3550' Dolomite

ELEVATION: 1867 K.B.

## FORMATION DATA

ANHYDRITE	674
HEEBNER	3099
BROWN LIME	3225
LANSING	3244
ARBUCKLE	3485
R.T.D.	3550

SURFACE CASING: Set 8-5/8"  
 at 270' with 225 sacks  
 cement

## A F F I D A V I T

STATE OF KANSAS, COUNTY OF BARTON ) ss.

Larry Curtis

~~XXXXXX~~, of lawful age, does swear and state that the facts

and statements herein contained are true and correct to the best of  
 his knowledge.

Subscribed and sworn to before me this 1st day of May, 1968.

My Comm. Expires:  
4-11-70

Neithy M. Hague  
 Notary Public

RECEIVED  
 STATE CORPORATION COMMISSION  
 MAY 2 1968  
 CONSERVATION DIVISION  
 Wichita, Kansas