


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

15-009-00010-00-00

WELL PLUGGING RECORD

NORTH

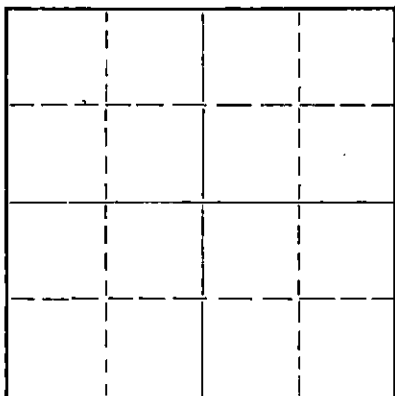

Locate well correctly on above
Section Plat

Barton County. Sec. 33 Twp. 16 Rge. 12 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Trans Era Petroleum, Inc.
Lease Name Finger Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 6/24/52 19
Application for plugging filed 12/15/54 19
Application for plugging approved 12/18/54 19
Plugging commenced 1/7/55 19
Plugging completed 1/11/55 19
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production December 9 19 54
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well ExxExxStamgh Warren Horner
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3325 1/2 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	201	None
				5 1/2"	3326 1/2	1719

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGING RECORD

Plugged back with crushed rock to 3125', dumped 5 sacks of cement, top of cement 3090'. Filled hole with mud to 200', set rock bridge, dumped 20 sacks of cement. Top of cement, 140'. Filled with mud to 35', set rock bridge, dumped 10 sacks of cement for cap.

RECEIVED
STATE CORPORATION COMMISSION
WICHITA, KANSAS

FEB 12 1955

CONSERVATION DIVISION
WICHITA, KANSAS

2-12-1955

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Miller Casing Pulling Co.
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
H. R. Michaelis

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

H. R. Michaelis


Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of February, 19 55

Margie Cooper

My commission expires 1-30-57

Notary Public.



B & R Drilling, Inc.
Finger #1

NE NE NE 33-16-12
Barton Co., Kans.

Total Depth: 3325½'
Comm. 6/11/52
Comp. 6/24/52

Casing

8 5/8" Set @ 201'
5 1/2" Set @ 3326½'

Cement

135 sacks Lehigh
100 sacks Lehigh

FORMATION

DEPTH

Surface clay-post rock	20
Shale-shells-red bed	201
Shale	385
Shale-red bed	580
Shale-shells	755
Anhydrite	785
Shale-shells	1065
Shale-lime	1380
Shale-salt	1425
Lime-shale	1560
Shale-salt	1621
Shale-lime	1810
Lime	1855
Shale-lime	2752
Lime	3242
Lime-shale	3285
Lime	3225½'

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

_____ *Lera D. Bate* _____

Subscribed and sworn to before me this 27th day of June, 1952.

_____ *Margie Cooper* _____
Notary Public

My commission expires: 1-30-57.

LOGGING
FILE REC 33 1/6 R 12W
BOOK PAGE 65 LINE 25