


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

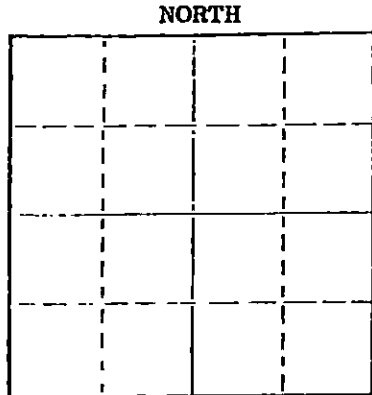

Locate well correctly on above Section Plat

Barton County. Sec. 33 Twp. 16 Rge. 12 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines C S/2 NE SW  
Lease Owner Earl Allen Oil Co.  
Lease Name Scheweis Well No. #1  
Office Address Box 105 Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed Dec. 13, 1974 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 2-11-75 19\_\_\_\_  
Plugging completed 3-6-75 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? \_\_\_\_\_

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3340' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3337'	2714.82'
				8 5/8"	330'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Made bottom hole plug back with sand to 3000'. Mixed and ran 5 sacks cement thru dump bailer.  
Filled hole with 4 sacks hulls - 25 sacks gel and 100 sacks cement.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec  
Box 364 Great Bend, Kansas  
(Address)

Subscribed and Sworn to before me this 7 day of March, 1975

Sidney D. Miller  
Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION

MAR 10 1975 3-10-1975

CONSERVATION DIVISION  
Wichita, Kansas

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

COPY

15-009-01256-00-00


Company: RIO HONDO OIL & DEVELOPMENT CORP.  
Farm: Schneweis No. 1

SEC. 33 T. 16 R. 12W  
C S 1/2 NE SW

Total Depth. 3340'  
Comm. 4-22-57  
Shot or Treated.  
Contractor.  
Issued. 10-12-57

Comp. 5-1-57

County Barton KANSAS



CASING:  
8 5/8" 330' w/175 sx cem.  
5 1/2" 3337' w/100 sx cem.

Elevation. 1878' DF

Production. 25 BOPD/ NW

Figures indicate Bottom of Formations.

shale-shells	510
red rock	755
anhydrite	790
shale-shells	1200
salt	1440
lime-shale	2115
shale-shells	2675
lime-shale	2978
Heebner	2982
lime-shale	3067
Brown lime	3072
lime-shale	3339 RTD
lime-shale	3340
Total Depth	

Cable Tool Report.  
Comm. 5-5-57  
Comp. 5-7-57

TOPS: Scout	
Heebner	2980
Lansing	3085
Conglomerate	3330
Arbuckle	3335

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 16 1974  
CONSERVATION DIVISION  
Wichita, Kansas