

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

STAFFORD County, Sec. 24 Twp. 21 Rge. 13 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NW NW  
COMMERCIAL OIL INC.

Lease Owner  
Lease Name HALL Well No. 1

Office Address 5252 N. Broadway Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) OIL

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 12-18 19 70

Plugging completed 12-18 19 70

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

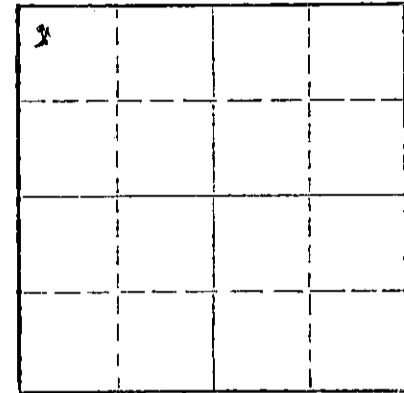

Name of Conservation Agent who supervised plugging of this well Dad TAWAN

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: SIZE 4 1/2, PULLED OUT 2510.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sand back to 3640 dump 4 sax cement load hole with water shoot @ 2710-2605-2510 work pipe loose pull 2510 feet. weld on 8 5/8" collar Allied Cementing pump 2 sax hulls 15 sax gel and 100 sax cement.

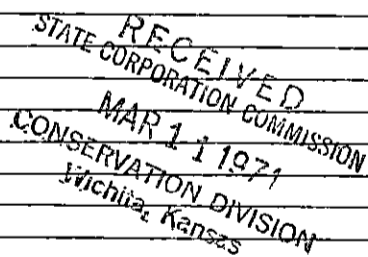

Name of Plugging Contractor RALPH COMSTOCK (If additional description is necessary, use BACK of this sheet)  
Address 320 N. Park Stafford, Kansas 490

STATE OF Kansas, COUNTY OF Stafford, ss. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph Comstock  
Stafford, KS (Address)

9th day of March, 1971  
Lawrence Richardson Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION  
DEC 14 1970  
CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS LOG

COMPANY:	Commercial Oil, Inc.
CONTRACTOR:	Phoenix Drilling Corporation
LEASE NAME:	Hall No. 1
LOCATION:	NW NW NW, Section 24-21S-13W Stafford County, Kansas
ELEVATION:	1869' K.B.
SURFACE CASING:	Ran 253 feet of 8-5/8" surface pipe.
COMMENCED:	December 27, 1968
COMPLETED:	January 12, 1969
ROTARY TOTAL DEPTH:	3660 feet

<u>FORMATION</u>	<u>DEPTH</u>	
Surface Soil-Sand	130	Spudded at 5:00 P.M. 12-29-68. Drilled 12-1/4" surface hole to 262 feet. Ran 253 feet of 8-5/8" surface pipe, Cemented with 250 sacks 60-40 Pozmix. Plug down at 10:15 A.M. 12-30-68. Cement circulated.  DST #1: 3295-3345' DST #2: 3345-3372' DST #3: 3400-3430 DST #4: Mis-run DST #5: Mis-run DST #6: 3497-3660'  Ran Electric Log.  Ran 115 Jts. (3660') 4-1/2" casing. Set 1 foot off bottom. Cemented with 150 sxs. Pozmix cement, 50/50 Salt saturated. Job completed at 4:30 P.M. 1-12-69.
Sand	155	
Shale	262	
Shale-Shells	709	
Anhydrite	737	
Shale-Shells	1045	
Shale	1470	
Shale-Lime	1704	
Lime-Shale	2133	
Shale-Shells	2640	
Shale-Lime	2780	
Lime-Shale	3115	
Lime	3185	
Shale-Lime	3276	
Lime-Shale	3345	
Lime	3372	
Lime-Shale	3430	
Lime	3435	
Lime-Shale	3600	
Lime	3625	
Lime-Shale	3635	
Arbuckle	3660	
RTD	3660	

STATE OF KANSAS     )  
                                  )     ss:  
COUNTY OF SEDGWICK )

The undersigned, being duly sworn on oath, states that the above statement and log are a true and correct record and log of the well drilled at the location above described.

Jas. J. Brown  
Jas. J. Brown

Subscribed and sworn to before me this 30th day of January, 1969.

Phyllis Gillen  
Phyllis Gillen, Notary Public

My commission expires August 30, 1969.

