


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Stafford County, Sec 23 Twp 21S Rge (E) 13 (W)

Location as "NE/CNW/SW" or footage from lines SE SW SE
Lease Owner Icer Addis
Lease Name Hall Well No. 1
Office Address 5307 East Central - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 12 1975
Application for plugging filed 19
Application for plugging approved October 12 1975
Plugging commenced October 12 1975
Plugging completed October 12 1975
Reason for abandonment of well or producing formation Dry Hole

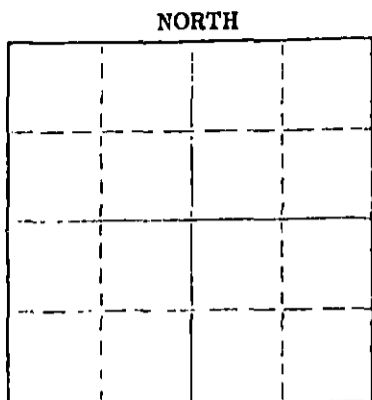

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well George Russell Bieberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3615
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface Casing	0	252	10 3/4		none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud from Total Depth to 250' - 25 sacks cement plug -
mud to 40', 10 sacks cement plug, 10 sacks in the rat hole,
job completed at 7:00 p.m.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Search Drilling Company
Address P. O. Box 18148 - Wichita, Kansas 67218

STATE OF Kansas COUNTY OF Sedgwick, ss.
William J. Froelich, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) William J. Froelich, Jr.
Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of October, 1975

My commission expires February 19, 1977 Notary Public.

MAXINE DRESSEN
NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. FEB. 19, 1977

RECEIVED
STATE CORPORATION COMMISSION

OCT 20 1975

CONSERVATION DIVISION
Wichita, Kansas

10-20-1975

DRILLERS LOG

CASING RECORD:

OPERATOR: Icer Addis

DESCRIPTION:

CONTRACTOR: Search Drilling Company

SE SW SE₂₃
Section 12-21S-13W
Stafford County,
Kansas

TOTAL DEPTH:

COMMENCED: September 7, 1975

COMPLETED: September 27, 1975

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	160	
Shale and Sand	160	230	
Shale	230	295	
Red Bed Shale	295	700	
Anhydrite	700	754	
Shale and Shells	754	815	
Shale	815	1571	
Shale	1571	1795	
Shale and Lime	1795	2105	
Shale and Lime	2105	2112	
Shale and Lime	2112	2290	
Lime and Shale	2290	2526	
Lime and Shale	2526	2715	
Lime and Shale	2715	2915	
Lime and Shale	2915	3135	
Shale and Lime	3135	3312	
Shale and Lime - Kansas City	3312	3415	
Lime	3415	3505	
Lime and Shale	3505	3615	Dry and Abandoned

RECEIVED
STATE CORPORATION COMMISSION

OCT 20 1975

CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SEARCH DRILLING COMPANY

William J. Froelich, Jr.
William J. Froelich, Jr.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 15th day of October, 1975.

My Commission Expires:
February 19, 1977

Maxine Dressen
Maxine Dressen Notary Public

MAXINE DRESSEN
NOTARY PUBLIC
SEBOWICK COUNTY, KANSAS
MY COMM. EXP. FEB. 19, 1977