

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Stafford County, Sec. 23 Twp. 21 Rge. 13 (E) (W)

Location as "NE/CNW&SW" or footage from lines NW NW NE  
Lease Owner Mr. S. A. Springer  
Lease Name Schmalion "B" Well No. 1  
Office Address 806 Union National Bank Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 11 1954  
Application for plugging filed June 11 1954  
Application for plugging approved June 11 1954  
Plugging commenced June 11 1954  
Plugging completed June 11 1954  
Reason for abandonment of well or producing formation Dry Hole

NORTH

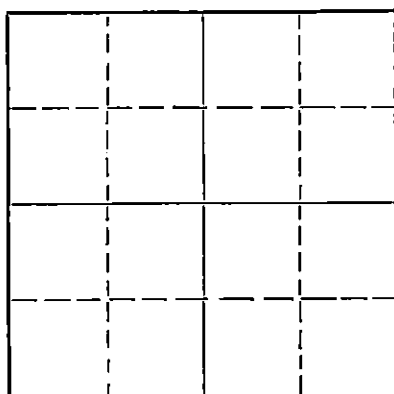

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production. 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. A. Rives  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3675' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	325'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug hole, pushed bottom plug to 270'. Cemented through drill pipe with 20 sacks of cement. Top plug at 35', set with 10 sacks of cement.

6-18-1954  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sterling Drilling Company  
Address Sterling, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.  
Rollin Mead (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rollin Mead  
Sterling, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 17th day of June, 1954

My Commission Expires Sept. 17, 1957

J. P. [Signature]  
Notary Public.

My commission expires

PLUGGING  
FILED SEC 23 T 21 R 13 W  
BOOK PAGE 40 LINE 32

WELL LOG

SERIALION "B"-91

Location: IN NW NE, Section 23-21-13  
Stafford County, Kansas

OWNER: S. A. Springer

NOTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMPLETED: 5-30-54 (w.r.)

COMPLETED: 6-11-54 (w.r.)

TOTAL DEPTH: 3675' (w.r.)

LOG


0-325 Shale & Sand  
 325-715 Shale & Red Bed  
 715-750 Anhydrite  
 750-815 Shale  
 815-1600 Shale & Shells  
 1600-1700 Shale & Lime  
 1700-1970 Lime  
 1970-2855 Lime & Shale  
 2855-3150 Lime  
 3150-3325 Shale & Lime  
 3325-3505 Lime  
 3505-3585 Shale & Lime  
 3585-3627 Simpson  
 3627-3675 Arb. Lime

CASING RECORD

Ran 325' of 8-5/8" Casing, set with  
 200 sacks of bulk cement.

PRODUCTION

Plugged & Abandoned



**RECEIVED**  
 STATE CORPORATION COMMISSION  
 JUN 18 1954  
 CONSERVATION DIVISION  
 Wichita, Kansas