


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

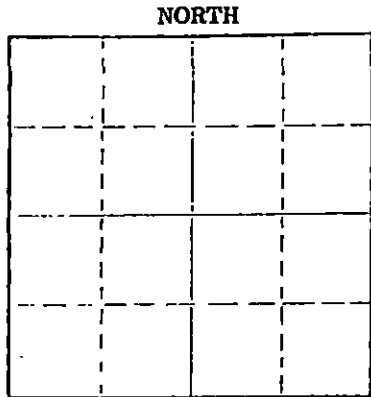

Stafford County. Sec. 5 Twp. 21 Rge. 14 (E) (W) x
 Location as "NE/CNWSW" or footage from lines SW SW NE
 Lease Owner Wilmer Otte
 Lease Name Dorfshaffer Well No. #1
 Office Address Route #1 Great Bend, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole)
 Date well completed 19
 Application for plugging filed 19
 Application for plugging approved 19
 Plugging commenced 2-1-75 19
 Plugging completed 2-10-75 19
 Reason for abandonment of well or producing formation
 If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
 Producing formation Depth to top Bottom Total Depth of Well 3618' Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3615'	2007.33'
				8 5/8"	540'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3600'. Mixed and ran 5 sacks cement thru dump bailer.
 Plug well with 3 sacks hulls - 20 sacks gel. 100 sacks cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Southwest Casing Pulling Co.
 Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.
 Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
 Box 364, Great Bend, Kansas
 (Address)

Subscribed and sworn to before me this 12 day of February 19 75
 24 October 1976
 Notary Public



RECEIVED
 STATE CORPORATION COMMISSION

FEB 13 1975

CONSERVATION DIVISION
 Wichita, Kansas

2-13-1975

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


15.185.19518.0000

Company- PETROLEUM, INC.
Farm- Dorfshaffer No. 1

SEC. 5 T. 21 R. 14W
SW SW NE

Total Depth. 3618'
Comm. 7-15-59 Comp. 7-24-59
Shot or Treated.
Contractor. Garvey Drlg.
Issued. 10-17-59

County Stafford
KANSAS



Elevation. 1921' KB

Production. 35 BOPD

CASING:

8 5/8" 540' cem w/325 sx.
4 1/2" 3615' cem w/125 sx.

Figures Indicate Bottom of Formations.

surface clay & sand	50
sand & shale	360
red bed	935
shale & shells	1490
sandy shale	1585
shale & lime	1790
lime	2370
lime & shale	2870
lime	3225
lime & shale	3325
lime	3545
lime & chert	3597
lime & Arbuckle	3618
Total Depth	

TOPS: SCOUT	
Heebner	3207
Douglas Shale	3236
Brown Lime	3309
Lansing	3320
Viola	3546
Simpson	3570
Arbuckle	3611

RECEIVED
STATE CORPORATION COMMISSION
OCT 31 1974
CONSERVATION DIVISION
Wichita, Kansas