

15-009-01159-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

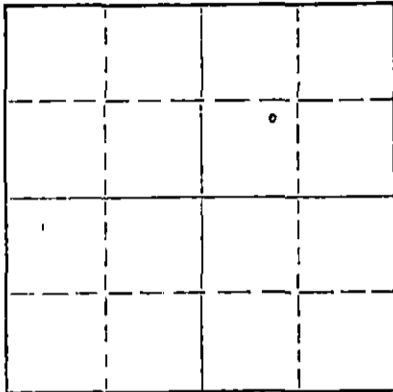

Locate well correctly on above
Section Plat

Barton County. Sec. 1 Twp. 16 Rge. (E) 13 (W)
Location as "NE/CNW/SW" or footage from lines NE SW NE
Lease Owner Petroleum, Inc.
Lease Name Rude Well No. 1
Office Address Box 433, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed March 24 1971
Application for plugging approved _____ 19____
Plugging commenced April 12 1971
Plugging completed April 15 1971
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3333 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	430'	8 5/8"	430'	none
		0	3330'	4 1/2"	3330'	2302.97

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 2900' and dumped 4 sacks of cement.

Set 20' rock bridge at 320'. Plugged well with 5 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
APR 27 1971
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor PIPE PULLERS, INC. (If additional description is necessary, use BACK of this sheet)
Address Box 486, Ellinwood, Kansas 67526

STATE OF KANSAS, COUNTY OF BARTON, ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 21 day of April, 1971

My commission expires Feb. 10, 1975

Serge A. Meyer
Notary Public.

15-009-01159-00-00

COPY


WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company: PETROLEUM, INCORPORATED
Farm: Rude No. 1

SEC. 1 T. 16 R. 13W
NE SW NE

Total Depth. 3333'
Comm. 11-19-57 Comp. 11-29-57
Shot or Treated.
Contractor. Garvey Drilling Company
Issued. 3-15-58

County Barton
KANSAS



Elevation. 1898' DF

Production. 190 BOPD

CASING:
8 5/8" 430' cem w/225 sx
4 1/2" 3330' cem w/150 sx

Figures indicate Bottom of Formations.

surface soil & postrock	60
shale & shells	830
Anhydrite	860
shale & shells	1835
shale & lime	2120
shale & shells	2610
shale & lime	2755
lime	2915
lime & shale	3075
lime	3268
lime & shale	3320
lime	3323
Quartzite	3333
Total Depth	

RECEIVED
STATE CORPORATION COMMISSION
MAR 25 1971
CONSERVATION DIVISION
Wichita, Kansas

TOPS: SCOUT	
Anhydrite	830
Heebner	2974
Toronto	2990
Douglas	3009
Brown Lima	3061
Lansing	3071
Quartzite	3312