


15-009-16143-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barton County. Sec. 1 Twp. 16 Rge. 13 (E) W (W)
Location as "NE/CNWxSWx" or footage from lines NW NE SE
Lease Owner SPECTER PIPE & SUPPLY, INC
Lease Name RUDE "R" Well No. 1
Office Address Box 169, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 9-9-58 19____
Application for plugging filed Dec. 16, 1965 19____
Application for plugging approved Dec. 17, 1965 19____
Plugging commenced December, 29, 1965 19____
Plugging completed January, 8, 1966 19____
Reason for abandonment of well or producing formation Depleted

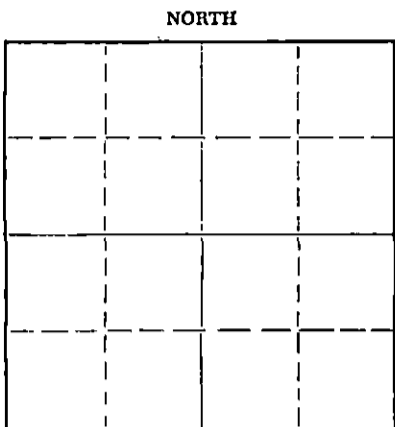

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan, Russell, Kansas
Producing formation Kansas City Depth to top 3320 Bottom 3350 Total Depth of Well 3359' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4"	360'	none
				7"	3294'	1817.50'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back with sand to - 3050-feet, dumped 5- sacks Cement.
Set a Rock Bridge at 350- feet, dumped 30- sacks cement.
Mudded Hole up to 40-feet, dumped 15- sacks Cement.

RECEIVED
STATE CORPORATION COMMISSION

JAN 17 1966

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LYNCH CASING PULLING, COMPANY. No. 457
Address R.R. 4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Specter Pipe & Supply (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of January, 1966

My commission expires Feb. 29, 1968
Barbara Krug Notary Public.

15-009-16143-00-00


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
502 East Murdock, Wichita, Kansas

Company- K & E & HELL OIL & GAS CO.
Farm- Rude "B" No. 1

SEC. 1 T. 16 R. 13W
NW NE SE

Total Depth. 3359'
Comm. 8-29-58 Comp. 9-9-58
Shot or Treated.
Contractor. K & E Drig. Inc.
Issued. 12-13-58

County Barton
KANSAS



Elevation. 1906' KB

Production. 92 BOPD

CASING:

10 3/4" 360' w/175 sx cem.
7" 3294' w/125 sx cem.

Figures Indicate Bottom of Formations.

shale	165
blue shale	220
red bed	360
shale	844
anhydrite	877
shale	1045
shale, shells	1520
lime, shale	1820
lime	2055
shale, lime	2733
lime	3025
shale	3077
lime	3339
Quartzite	3356 RTD
Quartzite	3359
Total Depth	

DEC 17 1965

TOPS: SCOUT	
Anhydrite	844
Heebner	2991
Toronto	3009
Douglas	3025
Brown Lime	3077
Lansing	3090
B/Kansas City	3320
Conglomerate	3334
Quartzite	3350