


15-009-16148-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Oath
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

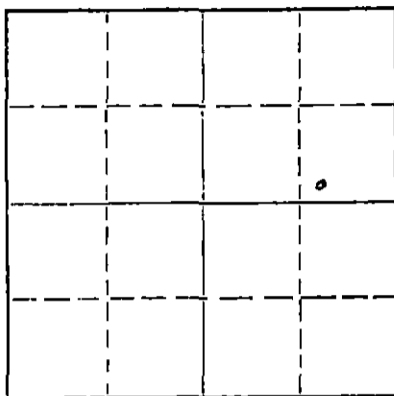

Locate well correctly on above
Section Plat

Barton County. Sec. 1 Twp. 16 Rge. (E) 13 (W)
Location as "NE/CNW/SW" or footage from lines SW SE NE
Lease Owner Petroleum, Inc.
Lease Name Rude Well No. 4
Office Address Box 433, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed March 24 19 71
Application for plugging approved _____ 19____
Plugging commenced March 27 19 71
Plugging completed April 13 19 71
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3348 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	527'	10 3/4"	527'	none
		0	3220'	7"	3220'	1665.08

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 2900' and dumped 6 sacks of cement.

Set 20' rock bridge at 320'. Plugged well with 6 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
APR 27 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas 67526

STATE OF KANSAS, COUNTY OF BARTON, ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21 day of April, 19 71

My commission expires Feb. 10, 1975

George A Meyer
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY

15-009-16148-00-00


Company. **PETROLEUM, INC.**
Farm. **Rude**

No. **4**

SEC. **1** T. **16** R. **13W**
SW SE NE

Total Depth. **3348'**
Comm. **6-30-58** Comp. **7-10-58**
Shot or Treated.
Contractor. **Garvey Drig. Co.**
Issued. **3-28-59**

County **Barton**
KANSAS



CASING:
10 3/4" 527' cem w/800 sx.
7" 3220' cem w/150 sx.

Elevation. 1900' DF

Production. **66 BOPD, 1% Wtr.**

Figures indicate Bottom of Formations.

surface soil, clay & sand 45
shale & shells 527
shale 813
Anhydrite 878
shale & shells 1600
shale & lime 1925
lime 2025
lime & shale 2190
shale & lime 2325
shale 2650
shale & lime 2865
lime 2960
lime & shale 3070
lime 3348
Total Depth

TOPS: SCOUT
Anhydrite 840
Topeka 2669
Heebner 2980
Brown Lime 3068
Lansing 3078
Base Kansas City 3257
Conglomerate 3265
Quartzite 3337

RECEIVED
STATE CORPORATION COMMISSION
MAR 25 1971
CONSERVATION DIVISION
Wichita, Kansas