


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

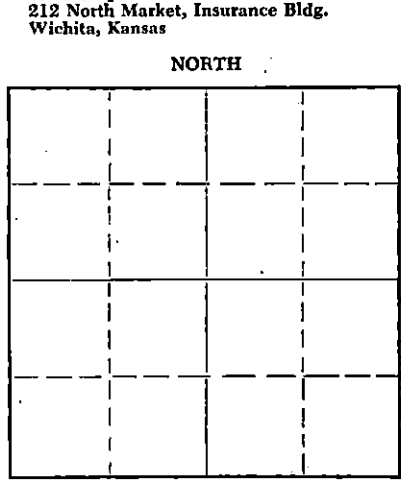

Barton County, Sec. 2 Twp. 16 Rge. 13 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NW NE SE
Lease Owner Fred J. Haynes
Lease Name Riemann Well No. 1
Office Address Bldg. & Loan Bldg., Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 20 19 60
Application for plugging filed January 20 19 60
Application for plugging approved January 20 19 60
Plugging commenced January 20 19 60
Plugging completed January 20 19 60
Reason for abandonment of well or producing formation No commercial production
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3404 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	301'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 290 feet to 40 feet for each plug set.
Hole filled with mud to 290' - Set plug at 290' and cemented with 1/4 sack hulls and 25 sacks cement; filled hole with mud to 40' - set plug at 40' and cemented with 1/4 sack hulls and 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
2-24-1960
FEB 24 1960

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Haynes Drilling Company
Address Bldg. & Loan Bldg., Russell, Kansas

STATE OF Kansas COUNTY OF Russell ss.
Fred J. Haynes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Fred J. Haynes
Bldg. & Loan Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of February 19 60

Ralph L. Achulte
Notary Public.
My commission expires January 17, 1961.



DRILLERS LOG
 Riemann # 1
 NW NE SE 2-16-13
 Barton County, Kansas

OPERATOR: Fred J. Haynes
 Bldg. & Loan Bldg.
 Russell, Kansas

CONTRACTOR: Haynes Drilling Company
 Russell, Kansas

COMMENCED: January 11, 1960

COMPLETED: January 20, 1960 CASING: 8 5/8" at 301'w/175sks

I. P. - D & A

TOPS: Anhydrite 862
 Br Lime 3096 -1194
 L-KC 3105 -1203
 Arbuckle 3356 -1454

FORMATION:

Surface Clay & Rock	30
Shale & Shells	301
Shale & Shells	440
Sand	470
Shale & Shells	595
Red Bed	862
Anhydrite	862-895
Shale & Shells	1085
Salt & Shale	1270
Shale, Shells & Lime	1410
Shale & Lime	1640
Lime & Shale	1735
Lime & Shale	2075
Shale & Lime	2570
Lime & Shale	2940
Lime	3356
Arbuckle & TD	3406

RECEIVED
 STATE CORPORATION COMMISSION

FEB 24 1960

CONSERVATION DIVISION
 WEL

I certify that the above is true and correct
 to the best of my knowledge.

Fred J. Haynes