

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Plat

Stafford County. Sec. 24 Twp. 21 Rge. 13 (S) W (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE NE NE
Lease Owner. Amil L. Schmalian
Lease Name. Schmalian Well No. 1
Office Address. 521 First National Bank Bldg., Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole). Dry hole
Date well completed. September 1, 1947 19
Application for plugging filed. October 17th, 1948 19
Application for plugging approved. October 18th, 1948 19
Plugging commenced. October 18th, 1948 19
Plugging completed. October 31st, 1948 19
Reason for abandonment of well or producing formation. Dry - no oil in
commercial quantities
If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. Herb Kerr
Producing formation. Depth to top. Bottom. Total Depth of Well. 3578 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
				5 1/2"	3593'	1451'-5"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 10 sacks cement on bottom filling from 3586 to 3550.

Mudded hole to 210 feet - dumped 15 sacks cement - mudding to 20 feet - capped with 10 sacks of cement.

(Plugged by H & F Casing Pulling Company - Russell, Kansas.)

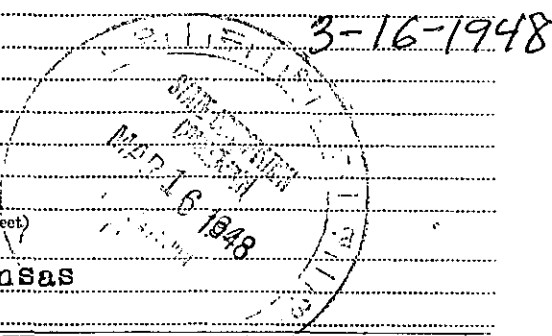

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to W. P. Faulkner
Address. 521 First National Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. Faulkner (Employee or owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. Faulkner
521 1st. Natl. Bk. Bldg., Wichita, Ks. (Address)

SUBSCRIBED AND SWORN to before me this 15th day of March, 1948
Wihma M. Ballard
Notary Public.

My commission expires Nov. 10, 1951

PLUGGING
FILE SEC 24 T 21 R 13W
BOOK PAGE 145 LINE 15

WELL LOG

Company: Faulkner Oil Company
 Lease: Schmaelion #1
 Sec. 24-213-13W
 County: Stafford County
 Contractor: Cambell Drilling Company
 Well Commenced: August 20, 1947
 Well Completed: September 2, 1947

0	
8	Cellar
15	Sand
35	Sand & Clay
120	Sand
135	Grey Shale
205	Sandy Clay
230	Shale
250	Shale & Shells
250	T.D. -- Run 11 Jts. 8 5/8" OD Casing
704	Red Bed
730	Anhydrite
1430	Shale & Shells
1595	Lime & Shale
1725	Pro. Lime
1850	Sandy Lime & Shale
1930	Sandy Lime
1955	Lime
2185	Shale & Lime
2280	Lime
2345	Lime & Shale
2630	Shale
2795	Lime & Shale
2865	Lime
3005	Lime & Shale
3260	Lime
3299	Shale & Lime
3530	Lime
3574	Shale - Various Colors
3578	Lime
3578	T.D. -- Casing Cmt. 4" Off Bottom 3593" 5 1/2" OD Spang Round Thread Casing - Cmt. With 100 Sks. Portland Buld Cement.

PLUGGING

FILE SEC 24 T 21 R 13W
 BOOK PAGE 145 LINE 15