


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 N.G. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

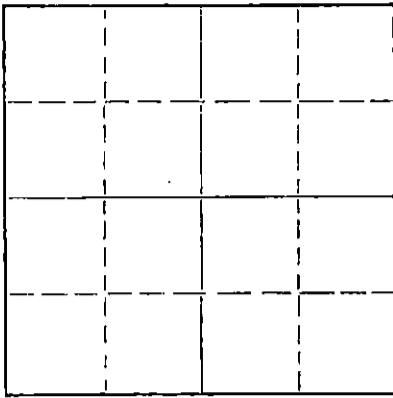

Locate well correctly on above  
Section Plot

Stafford County. Sec. 36 Twp. 21 Rge. 14W (E) (W)  
Location as "NE/CNW%SW%" or footage from lines SE SE SE  
Lease Owner Morgenstern & Specter  
Lease Name McGinty Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 8-6-52 19  
Application for plugging filed May 8, 1961 19  
Application for plugging approved May 9, 1961 19  
Plugging commenced May 11 1961 19  
Plugging completed May 17 1961 19  
Reason for abandonment of well or producing formation failure to produce  
produce profitably  
If a producing well is abandoned, date of last production April 30, 1961 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot St John, Kansas  
Producing formation Arbuckle Depth to top 3746 Bottom 3753 Total Depth of Well 3753 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	240 ft.	none
				5 1/2"OD	3746	2901 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with sand to 3700 feet. Dumped 5 sacks Cement.  
Pumped 10 sacks Mud, and 75 sacks Cement.

**RECEIVED**  
STATE CORPORATION COMMISSION  
JUN 8 1961  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor LYNCH CASING PULLING COMPANY NO. 457  
Address R. Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.  
Morgenstern & Specter, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morgan Specter  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of May, 1961

My commission expires Dec 1, 1964 Elmer Coody Notary Public.



LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
500 West Mardock, Wichita, Kansas


**COPY**

Company-HEXAGON OIL CO.  
Farm- McGinty No. 1

SEC. 36 T. 21 R. 14W  
SE SE SE

Total Depth 3753'  
Comm-5-21-52 Comp. 8-6-52

County Stafford  
KANSAS



Issue Date 8-20-60

CASING:

8" 240'  
5" 3746'

Elevation. 1916'

Production. Pmp 50 BO & tr wtr.

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE.

TOPS: SCOUT	
Heebner	3252
Brown lime	3376
Lansing	3388
Conglomerate	3628
Viola	3642
Simpson	3688
Arbuckle	3746