

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 N. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 36 Twp. 21 Rge. 14W (E) (W)

Location as "NE/CNW%SW%" or footage from lines SW SE SE

Lease Owner Morgenstern & Specter

Lease Name McGinty Well No. 2

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 8-18-53 19

Application for plugging filed May 9, 1961 19

Application for plugging approved May 10, 1961 19


Plugging commenced May 17 1961 19

Plugging completed May 27 1961 19

Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production April, 1961 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

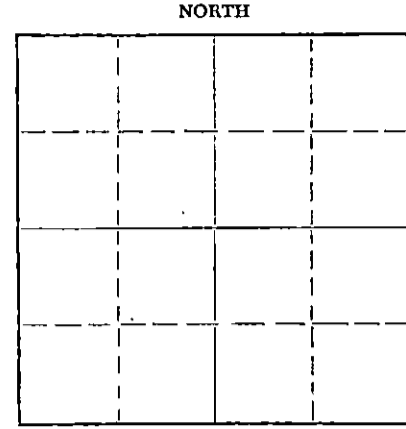

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot St John, Kansas

Producing formation Arbuckle Depth to top 3729 Bottom 3734 Total Depth of Well 3734 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	360 ft.	none
				5 1/2"OD	3749	2860 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3700 feet, Dumped 5 sacks cement, Pumped 10 sacks Mud, and 75 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JUN 8 1961

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling, Company No. 457

Address R. Rt. 4 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 1st day of June, 1961

My commission expires Feb. 29, 1964
Barbara Sartney Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15.185.12945.0000

Company- HEXAGON OIL COMPANY
Farm- McGinty No. 2

SEC. 36 T. 21 R. 11W
SW SE SE

Total Depth. 3734'
Comm. 8-6-53 Comp. 8-18-53
Shot or Treated.
Contractor. Pickrell Drilling Company
Issued. 4-13-57

County Stafford
KANSAS



Elevation. 1919'

Production. 50 bbls oil
& no water.

Figures indicate Bottom of Formations.

(Measurements from top of rotary bushing.)

sand	140
sand & clay	320
shale	360
shale & sand	660
red bed	832
Anhydrite	855
shale & shells	1315
sand	1390
shale & lime shells	1680
lime & shale breaks	1710
lime	1890
lime, sandy	2065
lime & shale breaks	2245
shale & lime	3122
lime	3295
lime & shale	3375
lime	3643
Viola lime	3681
Simpson shale	3734 RTD
Total Depth	

SLM @3610' O.K.

SCOUT TOPS

Heebner	3253
Brown Lime	3375
Lansing	3387
Viola	3643
Simpson	3681
Arbuckle	3729