

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-113-30244-00-01  
Spot: SWNENW Sec/Twnshp/Rge: 29-21S-1W  
990 feet from N Section Line, 1650 feet from W Section Line  
Lease Name: HUXMAN Well #: 12  
County: MCPHERSON Total Vertical Depth: 3439 feet

Operator License No.: 5663  
Op Name: HESS OIL COMPANY  
Address: PO BOX 1009  
MCPHERSON, KS 67460

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		2964		
PROD	5.5	3437		225 SX
SURF	8.625	253		200 SX
T1	2.875	2868		

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 06/27/2017 12:00 AM  
Plug Co. License No.: 5663 Plug Co. Name: HESS OIL COMPANY  
Proposal Rcvd. from: HESS OIL COMPANY Company: \_\_\_\_\_ Phone: (620) 241-4640

Proposed Plugging Method: Per District Office instructions.

Plugging Proposal Received By: \_\_\_\_\_ WitnessType: PARTIAL  
Date/Time Plugging Completed: 06/29/2017 3:00 PM KCC Agent: JERRY SPARLING

Actual Plugging Report:

Covered perfs 2964 feet to 2909 feet w/ 55 gallon sand and 5 sx cement. Perf @250 and pumped 130 sx 60/40 poz mix, 4% gel, down 5 1/2 casing. Filled to surface, but settled to 300' down. Filled to surface again w/ 40 sx oilfield redimix cement, inside and outside 5 1/2" casing.

Perfs:

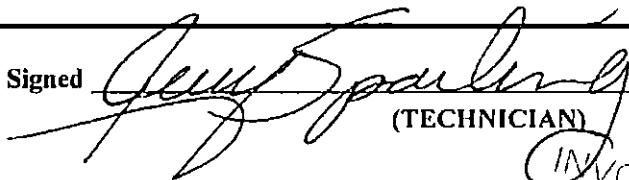
Top	Bot	Thru	Comments
2964			
2909	2945		

Remarks: QES TICKET #53352 BUILDER CONCRETE AND SUPPLY TICKET # 521884

Plugged through: CSG

District: 02

Signed

  
(TECHNICIAN)

INVOICED  
SEP 15 2017

Form CP-2/3

1/2