

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-23155-00-00
Spot: SWSWSWNW Sec/Twnshp/Rge: 6-21S-13W
2395 feet from N Section Line, 200 feet from W Section Line
Lease/Unit Name: GWB Well Number: 1
County: STAFFORD Total Vertical Depth: 3750 feet

Operator License No.: 32924
Op Name: GILBERT-STEWART OPERATING LLC
Address: 1801 BROADWAY - SUITE 450
DENVER, CO 80202

Conductor Pipe: Size feet: 121.88
Surface Casing: Size 8.625 feet: 326 WITH 225 SX CMT
Production: Size 5.5 feet: 3747 WITH 100 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 12/23/2002 1:30 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3600' & 5 SX CM T. 1ST PLUG AT 830' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 350' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 12/23/2002 3:25 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:


PBTD 3737'. PERFS AT 3591-3597'. SANDED TO 3500' & 5 SX CMT WITH A DUMP BAILER. SPOTTED PLUGS THROUGH CASING. 1ST PLUG AT 830' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 350' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

RECEIVED
DEC 31 2002
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2714' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

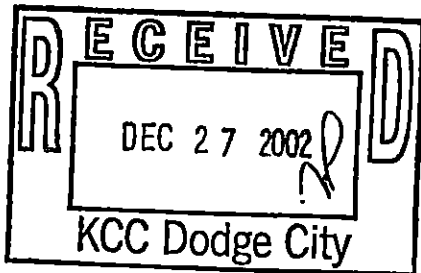

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED

DATE 12-31-02

WEL NO. 2003061045

Form CP 200