


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

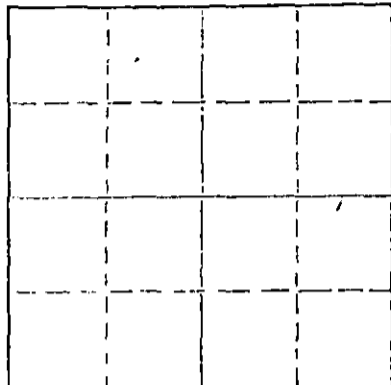

Locate well correctly on above
Section Plat

Stafford County. Sec. 6 Twp. 21 Rge. 13 (E) (W) X
Location as "NE/CNW/SE" or footage from lines SE/SE/SE
Lease Owner Woodman-Iannitti Drlg. Co.
Lease Name MORRISON Well No. 2
Office Address P. O. Box 308, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ October 9, 1974
Application for plugging approved _____ 19____
Plugging commenced _____ October 19, 1974
Plugging completed _____ October 25, 1974
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3609 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	811	None
				5 1/2	3607	2668.69'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured T.D. Pushed a plug to 3400'. Dumped 25' of sand and 5 sacks cement. Shot casing at 3000, 2900, 2800 and 2700'. Pulled a total of 86 joints of 5 1/2" casing. Pushed a plug to 360' and built a 20' rock bridge. Plugged well with 5 yards readymix concrete.

RECEIVED
STATE CORPORATION COMMISSION
OCT 30 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



CATHY MILLER
NOTARY PUBLIC
Barton County, Ks.

(Signature) James W. Rockhold
Box 698, Gt. Bend, Ks. 67530 James W. Rockhold
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of October, 1974

My commission expires September 30, 1975
Cathy Miller Notary Public.

Tulsa, Oklahoma
August 1, 1951

Sunray Oil Corporation
Tulsa, Oklahoma

Contractor: STICKLE DRILLING COMPANY
Drilling commenced: July 13, 1951
Drilling completed: July 28, 1951

Morrison #2-SE-SE-SE-
Sec. 6-21S-13W, Stafford
County, Kansas

DRILLERS LOG

Sand	0-45
Shale & Sand	45-120
Iron	120-130
Sand	130-180
Sand & Shale	180-285
Shale & Shells	285-450
Sand & Shale	450-520
Red Bed	520-802
Anhydrite	802-840
Shale & Shells	840-1670
Shale & Lime	1670-1725
Lime & Shale	1725-1845
Lime	1845-1930
Lime & Shale	1930-2315
Shale	2315-2495
Lime & Shale	2495-2700
Shale & Lime	2700-2810
Lime & Shale	2810-3035
Lime	3035-3255
Lime & Shale	3255-3395
Lime	3395-3468
Lime & Shale	3468-3480
Lime	3480-3535
Lime & Shale	3535-3576
Conglomerate	3576-3602
Lime	3602-3607 TD with rotary

RECEIVED
STATE CORPORATION COMMISSION

OCT 15 1974

CONSERVATION DIVISION
Wichita, Kansas

I, Frank E. Stickle, hereby certify the above to be a true and complete
drillers log of Sunray Oil Corporation's Morrison #2 SE-SE-SE- Section
6-21S-13W, Stafford County, Kansas.

Frank E. Stickle
Frank E. Stickle

Lillian T. Bonham
Notary Public

February 13, 1952
My commission expires