


Give All Information Completely
Make Required Affidavit
File or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15.185.12375.0000

WELL PLUGGING RECORD

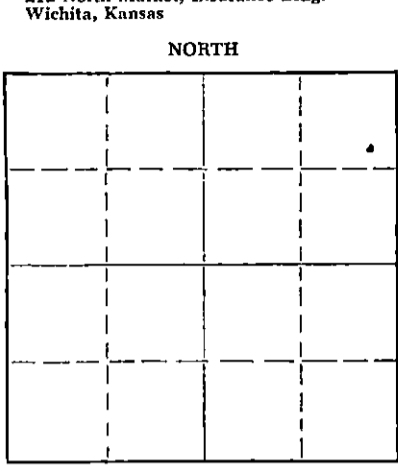

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines SE NE NE
County. Sec. 23 Twp. 22S Rge. 12E (E) (W)
Lease Owner INTERNATIONAL & PAINE, INC.
Lease Name PAUL MERRILL Well No. 1
Office Address First National Bank Building, Tulsa 3, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 4, 1961
Application for plugging filed April 4, 1961
Application for plugging approved April 4, 1961
Plugging commenced April 5, 1961
Plugging completed April 5, 1961
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot, St. John, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand & Red Mud	Surface Cng.	0	265'	8-5/8"	265'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED: Filled hole with mud 2650' up to 245'; set bridge using 1/3 ck. balls, plug, 20 ex. cement through drill pipe. Filled hole to 35' with mud, 10 ex. cement to cellar cerv.

Job completed: 1 a.m. - 4-5-61.

RECEIVED
STATE CORPORATION COMMISSION
APR 13 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor STARRA PETROLEUM CO., INC.
Address 206 Petroleum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
C. T. HOMAKER, DRILLING SUPT. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. T. Homaker C. T. HOMAKER, DRILL. SUPT.
Box 232, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of April, 1961
Gray, Dietz
Notary Public.

My commission expires 10-17-63

15:185.12375.0000

HELMERICH & PAYNE, INC. - Operator

SIERRA PETRO. CO., INC. - Contr.

THOM MAXWELL #1
SE NE NE
Sec. 23-215-12N
Stafford County, Kansas

T. D.: 2650'
Elev.: 1047' K.B.

Commenced: 3-25-61
Completed: 4-1-61

Casing:

Cement:

8-5/8" Set at 268'

with 250 sz. cement

FORMATION

Sand
Red Bed
Anhydrite
Shells, Shale & Salt
Shale & Shells
Lime & Shale
Lime
Conglomerate & Arbuckle

240'
630'
647'
1110'
1515'
2735'
3609'
3650'

TOPS:

Anhydrite
Topeka
Hesper
Toronto
Brown Lime
Lansing K. C.
Base K. C.
Conglomerate
Simpson Shale
Arbuckle

630'
2820'
3110'
3189'
3236'
3254'
3487'
3504'
3566'
3612'

RECEIVED
STATE CORPORATION COMMISSION

APR 13 1961

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
COUNTY OF RICEWELL) SS:

I hereby certify that the above information is true
and correct to the best of my knowledge.

C. T. Honaker

Subscribed and sworn to before me this 5th day of April
1961.

Geo. D. [Signature]
Notary Public

My commission expires: 10-17-63