

WELL PLUGGING RECORD

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
of formations.

Stafford County. Sec. 14 Twp. 21 Rge. 13 (E) W (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE SW SE  
Lease Owner PETROLEUM, INC.  
Lease Name Rothgarn Well No. 1  
Office Address 100 Derby Building, Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 12-30 19 49  
Application for plugging filed 2-1 19 50  
Application for plugging approved 12-24 19 49  
Plugging commenced 1-13 19 50  
Plugging completed 1-20 19 50  
Reason for abandonment of well or producing formation.

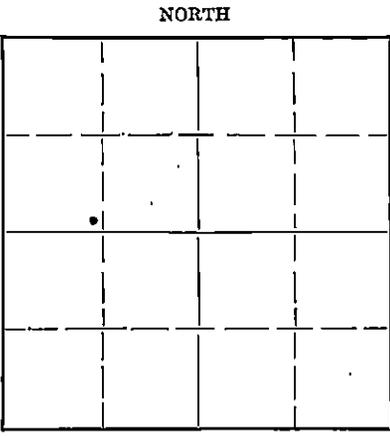

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough, Box 207, Great Bend, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 3597 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				237'	8 5/8	None
				3610.65'	5 1/2	3033'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 5 sacks of cement at bottom of hole. Shot pipe off at 3033'. Pulled pipe and mudded hole to 280'. Put 15 sacks of cement at 280'. Finished mudding hole and put 5 sacks of cement at top of surface.

FEB 3 1950 2-3-1950

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to PETROLEUM, INC.  
Address 100 Derby Building, Wichita 2, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Eric H. Jager (employee of owner) or (owner) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Eric H. Jager  
100 Derby Building, Wichita 2, Kans.  
(Address)

SUBSCRIBED AND SWORN to before me this 1 day of February, 1950

Marjorie Bradshaw  
Notary Public.

My commission expires October 27, 1952.



WELL LOG ROTHGARN NO. 1

Petroleum, Inc., Lease Owner

Section 14, Twp. 21S, Rge. 13W

Drillers, Inc., contractor

Location: NE SW SE

Rotary Total Depth: 3597'

County: Stafford, Kansas

Commenced: December 15, 1949

Production:

Completed: December 25, 1949

Elevation: 1867 D.F.

Casing: 237' of 8 5/8"  
3610.65 of 5 1/2"

Figures below indicate bottom of formation:

140	Sand & Gravel		
165	Shale		
195	Shale & Sand		
230	Shale & Shells		
840	Red Rock & Shells		
875	Anhydrite		
945	Shale & Shells		
1735	Shale & Lime		
2065	Lime		
2270	Shale & Lime		
2490	Shale & Shells		
2680	Shale & Lime		
2815	Shale & Lime		
2980	Lime		
3287	Shale & Lime		
3319	Lime		
3584	Shale		
3589	Lime		

Tons

840	Anhydrite
3144	Heebner
3268	Br. Lime
3285	Lansing
3527	Viola
3539	Simpson
3584	Arbuckle

3597 Rotary Total Depth

I hereby certify that this is a true and correct log of the above mentioned well.

PETROLEUM, INC.

*Eric H. Jager*  
Eric H. Jager

STATE OF KANSAS  
SS.  
SEDGWICK COUNTY

Subscribed to and sworn to before me, a Notary public in said County and State this 3rd day of January, 1950.

*Margaret Bradshaw*  
Notary Public

My Commission Expires: Oct. 27, 1952.

FEB 8 X 1950

