

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Stafford County, Sec. 14 Twp 21 Rge 13 XX W (W)

Location as "NE/CNW/SW" or footage from lines SW SW NW

Lease Owner Duke and Wood Drilling Co., Inc.

Lease Name Krey Well No. 1

Office Address P.O. Box 194, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed May 19 19 50

Application for plugging filed May 19 19 50

Application for plugging approved May 19 19 50


Plugging commenced May 19 19 50

Plugging completed May 19 19 50

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

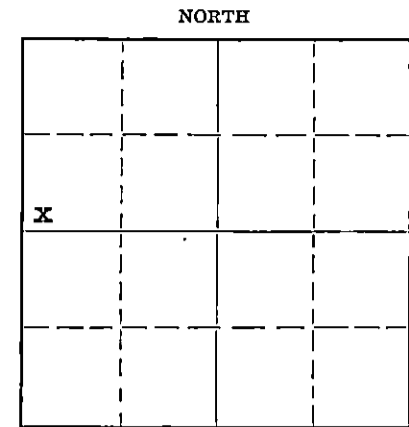

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well C. D. Stough

Producing formation None Depth to top Bottom Total Depth of Well 3725 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	211	8 5/8"	211	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with heavy mud to 210 ft. Set wood plug at 210 ft. Mixed and dumped twenty-five (25) sacks cement on plug at 210 ft. Filled hole with heavy mud to 30 ft. Set bridge plug at 30 ft. Mixed ten (10) sacks cement and dumped on same. Cement to bottom of cellar.

MAY 23 1950 5-23-1950

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Duke and Wood Drilling Co., Inc.  
Address P.O. Box 194, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Lynn O. Duke (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lynn O. Duke  
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22 day of May 19 50

Dean E. Coley Notary Public.

My commission expires April 29, 1953

PLUGGING 22-7377 4-49-10M  
FILE SEC-14-T-21-RLW  
BOOK PAGE-7-LINE-6

WELL LOG


Krey #1

SW SW Nw, Sec. 14 - 21 - 13W  
Stafford County, Kansas

0 - 40 Surface Soil & clay  
 40 - 80 Sand  
 80 - 105 Iron and sand  
 105 - 119 Hard sand & shells  
 119 - 140 Sand  
 140 - 211 Iron & blue shale  
 211 - 250 Blue shale  
 250 - 325 Shale & red bed  
 325 - 340 Sand  
 340 - 715 Red bed & shells  
 715 - 736 Red bed  
 736 - 766 Anhydrite  
 766 - 1010 Shale & shells  
 1010 - 1145 Shells & anhydrite  
 1145 - 1235 Shale  
 1235 - 1285 Salt  
 1285 - 1590 Shale & shells  
 1590 - 1665 Lime & shale  
 1665 - 1810 Lime & shale  
 1810 - 1815 Lime  
 1815 - 1885 Shale & lime  
 1885 - 2210 Lime & shale  
 2210 - 2235 Lime  
 2235 - 2460 Shale & lime  
 2460 - 2472 Shale  
 2472 - 2665 Shale & Lime  
 2665 - 2705 Lime  
 2705 - 2760 Lime & shale  
 2760 - 2813 Lime & shale  
 2813 - 2990 Lime  
 2990 - 3125 Lime  
 3125 - 3170 Lime  
 3170 - 3310 Lime & shale  
 3310 - 3441 Lime  
 3441 - 3510 Lime  
 3510 - 3560 Lime  
 3560 - 3575 Shale  
 3575 - 3675 Conglomerate  
 3675 - 3715 Shale & conglomerate  
 3715 - 3725 Arbuckle lime TD

TOPS

Anhydrite	736
Brown Lime	3307
Lansing	3322
Arbuckle	3706
Total Depth	3725
Heebner	3177

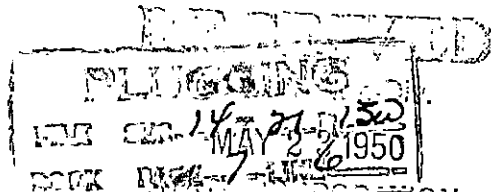

I Lynn O. Duke, Vice-President of Duke & Wood Drilling Company, Inc., do hereby certify that the above well log is true and correct to the best of my knowledge.

Subscribed and sworn to before me this 22 day of May 1950.

My commission expires April 29, 1953

Dean E. Cooley  
Notary Public