


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH



Locate well correctly on above  
Section Plat

Stafford County, Sec. 18 Twp. 21 Rge. 12W (E) (W)  
Location as "NE/CNW/SW" or footage from lines: NE NW NW  
Lease Owner: L. K. Parrish  
Lease Name: Christiansen Well No. #1  
Office Address: 4th National Bank Bldg. Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole): D & A  
Date well completed: September 16 19 63  
Application for plugging filed: September 16 19 63  
Application for plugging approved: September 16 19 63  
Plugging commenced: September 16 19 63  
Plugging completed: September 16 19 63  
Reason for abandonment of well or producing formation: Too Low structurally

If a producing well is abandoned, date of last production: 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Archie V. Elving, Pratt Kansas  
Producing formation: \_\_\_\_\_ Depth to top: \_\_\_\_\_ Bottom: \_\_\_\_\_ Total Depth of Well: 3625' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	262.75'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 275'.  
Set plug. Put in 20 sacks cement.  
Filled w/heavy mud to 40'. w/10 sack regular cement.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 20 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor: C. G. Drilling Co.  
Address: 107 Rule Bldg., Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
G. F. GALLOWAY


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. F. Galloway 107 Rule Bldg.  
(Address)

SUBSCRIBED AND SWORN to before me this 18 day of September 19 63

My commission expires MAY 20, 1967

Vicky Jacobs Notary Public.

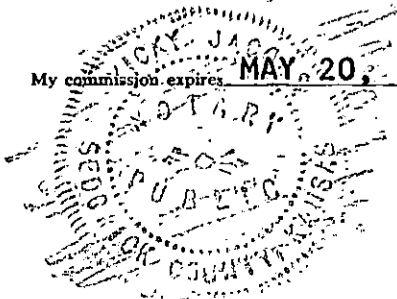

## WELL LOG

**OPERATOR** L. K. Parrish **SEC.** 18-21-12W  
**WELL NAME** Christiansen #1 **LOC.** NE NW NW  
**TOTAL DEPTH** 3625' **COUNTY** Stafford  
**COMM.** September 5, 1963 **COMP.** September 15, 1963 **STATE** Kansas  
**RIG NO.** #2 **ELEVATION** 1862 K.B.  
**CASING:** Set 262.75' (9 jts.) 8-5/8" OD Surface casing. **PRODUCTION:** Dry & Abandoned

All measurements taken from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	180	Sand		
180	261	Shale		
261	696	Red Bed		
696	728	Anhydrite		
728	1550	Shale & Shells	1000' - 0°	
1550	1720	Shale & Lime		
1720	1810	Lime & Shale		
1810	2640	Shale & Lime	2000' - 0°	
2640	2715	Lime & Shale		
2715	2875	Shale & Lime		
2875	3040	Lime & Shale		
3040	3165	Lime		DST 3562 - 3567
3165	3554	LIME		DST 3575 - 3584
3554	3567	Cong. & Arbuckle		
3567	3625	Arbuckle		

**RECEIVED**  
STATE CORPORATION COMMISSION

SEP 20 1963

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
 ) SS.  
COUNTY OF SEDGWICK)

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By

G. F. Galloway

SUBSCRIBED AND SWORN TO, BEFORE ME, THIS 16 day of SEP, 1963

My commission expires:  
May 20, 1963

Vicky Jacobs - Notary Public