

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Stafford County, Sec. 18 Twp. 21 Rge. 12 (E) (W) X

Location as "NE/CNW/SW" or footage from lines SE/NE/NE
Lease Owner Carl Boxberger
Lease Name CHRISTIANSEN Well No. 1
Office Address Box 474, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed August 8, 1974
Application for plugging approved 19
Plugging commenced September 27, 1974
Plugging completed October 17, 1974
Reason for abandonment of well or producing formation Depleted

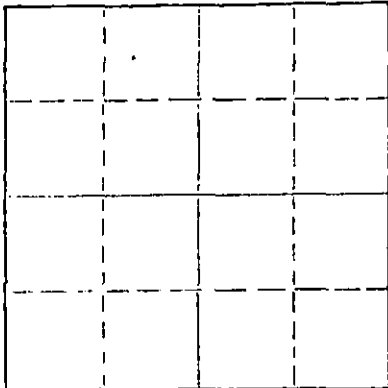

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 3613 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	250	-0-
				4 1/2	3613	1979.73'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured T.D. Pushed a plug to 3200'. Dumped 25' of sand and 4 sacks cement. Shot casing at 2830, 2600, 2500, 2320, and 2000'. Pulled a total of 58 jts. of 4 1/2" casing. Squeezed well with 2 sacks hulls, 20 sacks gel and 100 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698, Great Bend, Kansas 67530
(If additional description is necessary, use BACK of this sheet)

STATE OF Kansas COUNTY OF Barton ss.
James W. Rockhold

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
Box 698, Gt. Bend, Ks. 67530 James W. Rockhold
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of October, 1974

My commission expires September 30, 1975

Cathy Miller
Notary Public

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

503 East Murdock,

Wichita, Kansas


15.185-01381-0000

Company- L. K. PARRISH
 Farm- Christiansen No. 2

SEC. 18 T. 21 R. 12W
 SE NE NE

Total Depth. 3613'
 Comm. 12-17-63 Comp. 12-30-63
 Shot or Treated.
 Contractor. C-G Drlg.
 Issued. 3-14-64

County Stafford
 KANSAS



Elevation. 1683' KB

Production. DRY

CASING:

8 5/8" 249.94' cem w/ 260 so

Figures Indicate Bottom of Formations.

sand	225
shale	250
red bed	675
anhydrite	705
shale shells	1545
shale -lime	2875
lime	3170
lime-shale	3250
lime	3604
Conglomerate	3613 KTD
Total Depth	

TOPS: SMP	
Anhydrite	675
Heebner	3105
Brown Lime	3234
Lansing	3251
Base Kansas City	3470
Viola	3491

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 9 1974
 CONSERVATION DIVISION
 Wichita, Kansas