


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stafford County, Sec. 18 Twp. 21 Rge. 12W (2) (NW)

Location as "NE/CNWxSWx" or footage from lines SE SW SE  
Lease Owner Tennessee Gas Transmission Company  
Lease Name Cora Clark Well No. 7  
Office Address P. O. Box 163 - Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 19  
Application for plugging filed October 6, 19 59  
Application for plugging approved October 7, 19 59  
Plugging commenced October 7, 19 59  
Plugging completed October 9, 19 59  
Reason for abandonment of well or producing formation Dry Hole

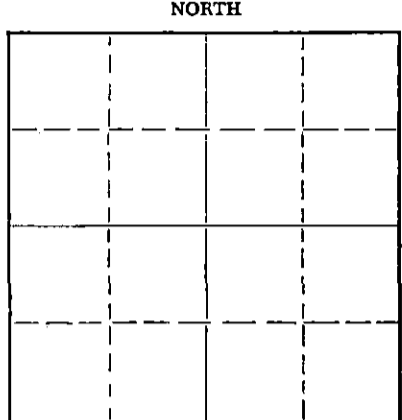

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot  
Producing formation Depth to top Bottom Total Depth of Well 3634 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	270'	none
				5-1/2"	3583'	2621'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked the hole to 3350' and found it open.  
Bottom was plugged off. Pulled 5 1/2" casing.  
Cleared hole and mudded the hole to 260',  
set rock bridge to 250', and dumped 20 sacks  
of cement with bailer. Mudded the hole from  
190' to 40', set rock bridge to 30' and ran  
10 sacks of cement to base of cellar.

PLUGGING COMPLETED

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 15 1959  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Knight Casing Pulling Company  
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Glen E. Armour (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Glen E. Armour  
P. O. Box 163 - Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of October, 1959

My commission expires October 13, 1962  
John Lemon Notary Public

RECEIVED  
STATE COMMISSION

OCT 7 1959

CONSERVATION DIVISION  
Wichita, Kansas

CORPORATION COMMISSION

OF KANSAS

WELL RECORD

PRODUCER: Midstates Oil Corporation  
 ADDRESS: 518 National Bank of Tulsa Bldg., Tulsa 3, Oklahoma  
 FARM NAME: Cora Clark WELL NO. 7  
 WELL LOCATED: SE SW SE Sec. 18-21S-12W Stafford County, Kansas  
 DRILLING COMMENCED: March 10, 1951 DRILLING COMPLETED: April 23, 1951  
 STATUS: Dry Hole ELEVATION: \_\_\_\_\_

CASING RECORD

<u>Size</u>	<u>Where Landed</u>	<u>No. Sacks Cement</u>
8-5/8"	278	225
5-1/2"	3582 1/2	150

<u>Top</u>	<u>Bottom</u>	<u>Formation</u>
0	40	Sand & Clay
40	278	Sand & Shale
278	840	Shale & Red Bed
840	880	Anhydrite
880	1300	Shale & Red Bed
1300	1580	Shale
1580	1630	Anhydrite
1630	1730	Shale & Shells
1730	1985	Lime & Shale
1985	2705	Shale & Lime
2705	2860	Lime & Shale
2860	3170	Lime, Shale
3170	3195	Lime
3195	3260	Shale
3260	3460	Lime, Shale
3460	3582	Lime & Shale
3582	3585	Arbuckle Lime
3585	3587	Shale & Dolomite
3587	3590	Corrected depth LW
3590	3595	Shale & Dolomite
3595	3605	Dolomite
3605	3611	Dolomite & Shale
3611	3613	Gray Shale
3613	3616.5	Shale
3616.5	3622	Shale & Dolomite
3622	3627	Dolomite & Shale
3627	3634	Dolomite
Total Depth	3634	

3434  
186  
-1767

Signed: W. H. Barclay  
 W. H. Barclay  
 Date: August 20, 1951