


DISTRICT CONSERVATION AGENT'S REPORT

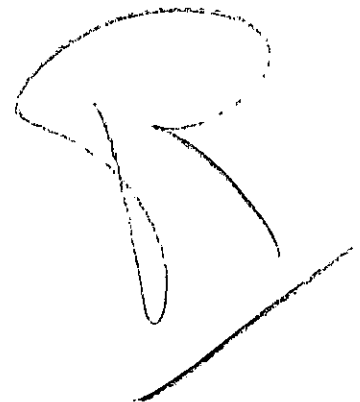

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NE. 7E. SE

SEC. 4 TWP. 21 RGE. 14-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Arky

Operator Anschutz Drilling Co Address #709 N. N. Blk. Bldg. Wichita-Kans.

Field _____ County Stafford

Total Depth 360.5 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/2" - 824 ft - Circulated with cement.
5 1/2" casing set at 360.5 ft - Cemented with 100 sacks of
cement. Loss Wells Plug at 347.5 ft - Plugged back
to 343.0 ft with chat - Drilled 1/2 sacks of cement
at 343.0 ft - Shot off & pulled the 5 1/2" casing - mud to
250 ft - Set Rock Bridge & 15 sacks of cement at 250 ft
Mud to 30 ft - Plug & 10 sacks of cement
at the surface.

RECEIVED
STATE CORPORATION COMMISSION

FEB 9 1951

CONSERVATION DIVISION
Wichita, Kansas

C. N. Stover
District Conservation Agent

Date 2-7-51

PLUGGING
FILE SEC 4 T 21 R 14 W
PAGE 59 LINE 6



STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 800 BITTING BUILDING
 WICHITA, KANSAS

January 17, 1951

Well No. 1
 Lease Asher
 Description NE NE SE 4-21-11W
 County Stafford
 File No. 56-6

Anschutz Drilling Company, Inc.
 1307 1/2 Main
 Great Bend, Kansas

Gentlemen:

This letter is your authority to plug the above subject well, in accordance with the Rules and Regulations of the State Corporation Commission. When you are ready to plug this well, please contact our District Plugging Supervisor, Mr. C. D. Stough, Box 207, Great Bend, Kansas.

STATE CORPORATION COMMISSION
 CONSERVATION DIVISION

BY: J. P. Roberts
 J. P. ROBERTS

cc: DISTRICT PLUGGING SUPERVISOR