


DISTRICT CONSERVATION AGENT'S REPORT

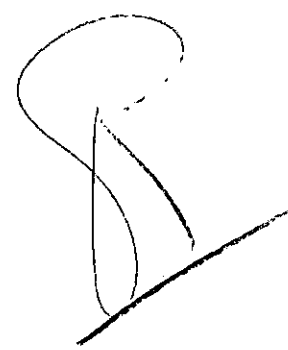

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 6-1

LOCATION 724/4

SEC. 6 TWP. 16 RGE. 13w

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 8 Lease Bitter, "A"

Operator Cities Service Oil Co Address Box #751 - St. Bernard, Kans.

Field _____ County Barton

Total Depth 3359 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/8 - 352 ft. Circulated with cement.
5 1/2 casing set at 3346 ft. Plugged back to 3200 ft
with mud. Set bridge & 5 sacks of cement at 3200 ft
Ripped off & pulled the 5 1/2 casing - Filled with mud
to 250 ft - Pack bridge & 10 sacks of cement at
350 ft - Mudd to 20 ft - Plug & 10 sacks of
cement at the surface -
Shull - Casing Pulling & Plugging Contractors

Conservation Division

JUN 14 1950

STATE CORPORATION C. W. Stough
District Conservation Agent

KANSAS
Date 6-10-50

