


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

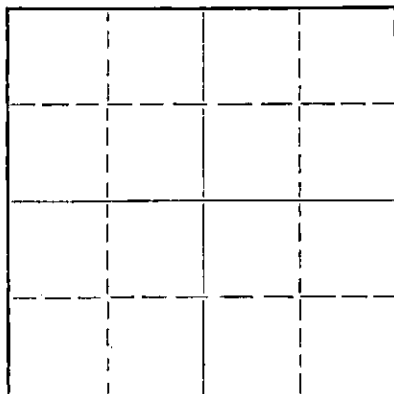

Locate well correctly on above
Section Plat

Pawnee County. Sec. 27 Twp. 21 Rge. 16 (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NE NW
Lease Owner Morgenstern & Specter
Lease Name Smith Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 12-1-53 19__
Application for plugging filed Nov. 21, 1963 19__
Application for plugging approved Nov. 22, 1963 19__
Plugging commenced January 8, 1964 19__
Plugging completed February 10, 1964 19__
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production _____ 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation Arbuckle Depth to top 3874 Bottom 3875 Total Depth of Well 3876 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	995	none
				5 1/2" OD	3875 ft.	2688.24

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back with sand to 3490- feet, dumped 4- sacks cement.
Pumped Mud and one-hundred sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

FEB 17 1964
2-17-64
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LYNCH CASING PULLING, COMPANY NO. 457
Address Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 14th day of October, 19 64

My commission expires Dec 1, 1964

[Signature]
Notary Public.

15.145.01397.0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- SUNRAY OIL CORPORATION
Farm- P. W. Smith No. 1

SEC. 27 T. 21 R. 16W
SE NE NW

Total Depth. 3876
Comm. 11-16-53 Comp. 12-1-53
Shot or Treated.
Contractor. Stickle Drilling Co.
issued. 2-20-54

County Pawnee
KANSAS



CASING:
8" 995'
5" 3875'

Elevation. 1992' RB

Production. Pmp. 182.94 BOPD,
no rate

Figures indicate Bottom of Formations.

sand	85
clay & shale	445
sand	535
red bed	986
anhydrite	1015
shale & shells	1900
lime & shale	3180
lime	3769.2
conglomerate	3842
simpson sand	3874
arbuckle	3876
Total Depth	

RECEIVED
STATE CORPORATION COMMISSION

NOV 22 1963

CONSERVATION DIVISION
Wichita, Kansas

TOPS:	
Heebner	3398
Toronto	3416
Iatan	3497
Lansing-Kansas City	3507
Marmaton	3764
Conglomerate	3783
Simpson	3812
Arbuckle	3874