

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

15.145.00919.0000

API NUMBER Drilled 5-54

LEASE NAME Miles

WELL NUMBER 4

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

NE SW SE Ft. from S Section Line

 Ft. from E Section Line

LEASE OPERATOR Champlin Petroleum Co.

SEC. 27 TWP. 21S RGE. 16W (E) or (W)

ADDRESS 6441 NW Grand Blvd. Suite 300 Okla. City, Okla.

COUNTY Pawnee

PHONE# (405) 840-5521 OPERATORS LICENSE NO. 6417

Date Well Completed 5-19-84

Character of Well Oil

Plugging Commenced 11-15-84

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 11-16-84

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Dodge City

Is ACO-1 filed? If not, is well log attached? Yes

Producing Formation Depth to Top Bottom T.D. 3867

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8 5/8	754	none
				4 1/2	3867	2027
				7"	1038	none
				2 7/8	3865	3865

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Pump 1 sk. of hull's & 25 sks. of cement @ 3870 to 3670

Pump 25 sks. of cement @ 1038

Pump 30 sks. of cement @ 760

Put 10 sks. of cement @ 40 to 0 Cut off & cap 8 5/8 3' below ground level

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Sargent's Casing Pulling Service License No. 6417 RECEIVED

Address Box 506 Liberal, Kansas 67901

STATE CORPORATION COMMISSION

STATE OF Oklahoma COUNTY OF Oklahoma, ss.

DEC 20 1984

Marilyn Day

(Employee of Operator) CONSERVATION DIVISION

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Marilyn Day

(Address) 6441 N. W. Grand, Okla City, Ok 73116

SUBSCRIBED AND SWORN TO before me this 19th day of December, 19 84

[Signature]
Notary Public

My Commission Expires: 10-8-87

RECEIVED DEC 8 1984

Form CP-4
Revised 08-84

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas


COPY

Company- CHAMPLIN REFINING CO.
 Form- Miles No. 4

SEC. 27 T. 21 R. 16W
 NE SW SE
 990' from SL, 1650' from EL
 of SE/4

Total Depth. 3870'
 Comm. 4-26-54 Comp. 5-19-54
 Shot or Treated.
 Contractor.
 Issued. 8-14-54

County Pawnee
 KANSAS



CASING:
 8 5/8" 754.31' cem w/500 sx
 7" 1038.94' cem w/425 sx

Elevation. 1989' DE

Production. 77 BO & 36 wtr.

Figures indicate Bottom of Formations.

sand	105
shale-sand	977
anhydrite	978
anhydrite-shale-sand	1148
sandy shale	1461
shale-sand	1792
shale-lime	3089
shale-lime-sand	3133
lime-sand	3172
shale-lime	3218
lime	3480
shale-lime	3509
lime	3814
shale-lime	3870
Total Depth	

Tops:	
Hebner	3386
Toronto	3407
Douglas	3424
Lansing-Kansas City	3735
Conglomerate	3768
Arbuckle	3867


RECEIVED
 STATE CORPORATION COMMISSION

NOV 09 1954

CONSERVATION DIVISION
 Wichita, Kansas

STATE CORPORATION COMMISSION
 Conservation Division
 600 Building Building
 Wichita, Kansas

COUNTY Lawrence SEC. 27 TWP. 21S RGE. 16W
 COMPANY OPERATING Champlin Refining Company
 OFFICE ADDRESS Box 552 - Enid, Oklahoma
 WELL NAME W-108 WELL NO. 4
 WELL LOCATED NE/4 SE/4, SE/4 or 990' from South line and
1650' from East line of SE/4
 CHARACTER OF WELL Oil

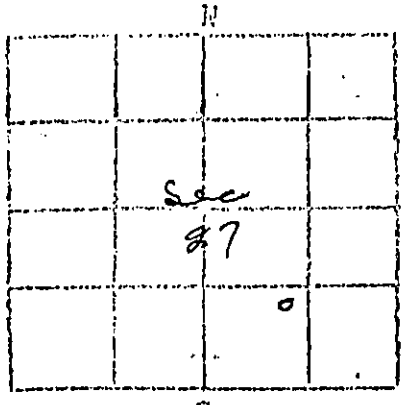

DRILLING COMMENCED April 26, 1954 DRILLING COMPLETED May 19, 1954

SIZE	WEIGHT	THDS	MAKE	FT.	AMOUNT PULLED	CEMENT
8-5/8"	754.31'	32#	National Tubo	754.31'		500 Sacks
7"		23#	8 Rd Republic	1038.94'		125 Sacks
2" EUE	3693.16'	4.70#	8 Rd National			

FORMATION RECORD

	TOPS	BOTTOM	Geological Tops:	TOPS	BOTTOM
Sand	0	105	Rebner	3386	
Shale-Sand	105	977	Toronto		3407
Anhydrite	977	978	Douglas		3424
Anhydrite-Shale-Sand	978	1148	Lansing K.C.		3735
Sandy Shale	1148	1461	Conglomerate		3768
Shale-Sand	1461	1792	Arbuckle		3867
Shale-Lime	1792	3089			
Shale-Lime-Sand	3089	3133			
Lime-Sand	3133	3172			
Shale-Lime	3172	3218	Elevation: 1989 D.F.		
Lime	3218	3420			
Shale-Lime	3420	3509			
Lime	3509	3814			
Shale-Lime	3814	3870 T.D.			

RECEIVED
 STATE CORPORATION COMMISSION

MAY 09 1954
 CONSERVATION DIVISION
 Wichita, Kansas
J. G. Wentworth
 Superintendent

Notary Public