
Form CP-3 Rev. 6-26-62

KANSAS

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

INV. NO. ____

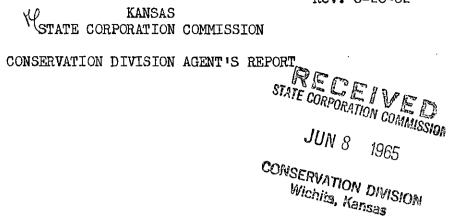

| Operator's Full Name Kaiser-Francis |
|--|
| Complete Address: 909 Palace Bldg., Tulsa, Oklahoma 74103 |
| Lease Name Christiansen "B" Well No. # 1 |
| Location C E/2 E/2 NW Sec. 18 Twp. 21 Rge. 12 (E) (W) W |
| County Stafford Total Depth 3580 |
| Abandoned Oil Well Gas Well Input Well SWD Well D & A X |
| Other well as hereafter indicated: |
| Plugging Contractor: Leben Drilling, Inc. |
| Address: 815 Wichita Plaza, Wichita, Kansas License No. |
| Operation Completed: Hourl: 00AMDay 7th Month June Year 1965 |
| The Above well was plugged as follows: |
| 270' of 8 5/8" surface pipe, cemented with 225 sacks. Fluid level in |
| hole was at 100. 1st cementing plug and $\frac{1}{L}$ sack of hulls was pushed |
| in fluid to 260', and cemented with 25 sacks, through the drill pipe. |
| Hole was filled with drilling mud to 40', 2nd cementing plug, bridged |
| solid with hulls on fluid at 40', and cemented with 10 sacks to the |
| base of the cellar. Rat hole bridged and cemented with 2 sacks. |
| |
| |
| I hereby certify that the above well was plugged as herein stated. |
| Signed: (14 die Eleven |
| DATE 6/8/65 Well Plugging Supervisor |