

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report To:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Stafford County. Sec. 29 Twp. 21S Rge. 13 (E) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE SW SW
Lease Owner. PETROLEUM, INC.
Lease Name. John Keenan 'A' Well No. 1
Office Address. 100 Derby Building, Wichita, 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed. April 26, 19.50
Application for plugging filed. May 24, 19.50
Application for plugging approved. April 28, 19.50
Plugging commenced. April 26, 19.50
Plugging completed. April 26, 19.50
Reason for abandonment of well or producing formation. dry hole

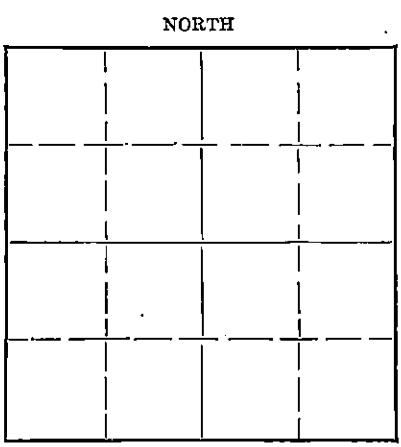

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production. 19.
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well. C. D. Stough
Producing formation. Depth to top. Bottom. Total Depth of Well. 3767 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	233.9'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 228', placed
plug in bottom of surface casing at 228'.
Mixed and displaced through drill pipe 15
sacks of cement at 228'. Filled hole with
heavy mud to 30', placed plug at 30'.
Mixed and dumped 10 sacks of cement, filling
hole to top of surface casing in bottom of
cellar.



MAY 25 1950 5-25-1950

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to. PETROLEUM, INC.
Address. 100 Derby Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


Eric H. Jager (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) Eric H. Jager
Exec. Vice-President
100 Derby Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of May, 1950.

Marjorie Bradshaw
Notary Public.

My commission expires

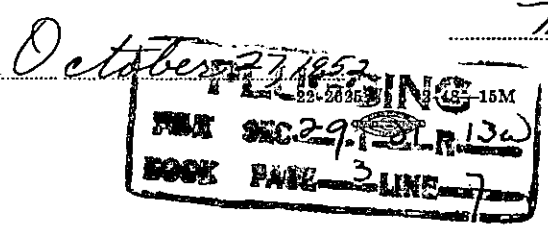

WELL LOG JOHN KEENAN 'A' 1

Petroleum, Inc., Lease Owner

Section 29, Twp. 21S, Rge. 13W

Drillers, Inc., Contractor

Location: NE SW SW

Rotary Total Depth: 3767'

County: Stafford, Kansas

Commenced: April 14, 1950

Production:

Completed: April 26, 1950

Elevation: 1911 D.F.

Casing: 233.9' of 8 5/8"

Figures below indicate bottom of formation:

	<u>Tops</u>
822 Anhydrite	792 Anhydrite
905 Shale & Shells	3240 Heebner
1650 Lime & Shale	3261 Toronto
1700 Lime	3367 Br. Lime
2095 Lime & Shale	3382 Lansing
2280 Shale & Shells	3598 B.K.C.
2435 Shale & Lime	3625 P.B.C.
2615 Shale & Shells	3654 Viola
2755 Lime & Shale	3696 Simpson
2950 Shale & Shells	3751 Arbuckle
3055 Lime & Shale	
3115 Lime	
3310 Shale	
3357 Shale & Shells	
3367 Shale	
3417 Lime	
3625 Shale	
3644 Conglomerate	
3694 Chert (viola)	
3737 Shale	
3762 Lime	

3767 Rotary total depth

I hereby certify that this is a true and correct log of the above mentioned well.

PETROLEUM, INC.

Eric H. Jager
Eric H. Jager

RECORDED

Conservation

MAY 25 1950

STATE COMMISSION

STATE OF KANSAS

SS.

SEDGWICK COUNTY

Subscribed to and sworn to before me on this 27th day of May, 1950.

PLUGGING
BOOK PAGE 3 LINE 7

Notary Public in said County and State 1950.

Marjorie Bradshaw
Notary Public

My Commission expires: October 27, 1952.