

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
806 Pitting Building
Wichita, Kansas

Stafford County. Sec. 21 Twp. 21 Rge. (E) 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C-E 1/2 NE 1/4 SW 1/4
Lease Owner W. P. Faulkner
Lease Name Keenan Well No. 1
Office Address Mark Twain Hotel, St. Louis, Missouri
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 7-31 19 42
Application for plugging filed 7-31 19 42
Application for plugging approved 7-31 19 42
Plugging commenced 7-31 19 42
Plugging completed 7-31 19 42
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Alexander
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10 3/4"	194'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped heavy mud in hole before laying down drill pipe.
Pumped hole every 500' while laying down drill pipe.
Mud from 3736' to 194'.
Set bridge at 194'.
Cement from 194' to 164'.
Mud from 164' to 26'.
Set bridge at 26'.
Cement from 26' to 6'.
Cement was run in hole through 4 1/2" Drill Pipe.



PLUGGING
FILE 21 21R 13W
BOOK PAGE 46 LINE 5

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to W. P. Faulkner
Address c/o Mark Twain Hotel, St. Louis

STATE OF Kansas, COUNTY OF Sedgwick, drilling contractor
(employee of ~~the above-described well~~) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lawrence J. Sneed

713 First National Building, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 4 day of August 1942

Seyf Sneed
Notary Public.

My Commission Expires March 30, 1944




KEENAN WELL NO. 1

Location:	Center of E 1/2 NE 1/4 SW 1/4,	21-21S-13W, Stafford County, Kans.
Owner:	W. P. Faulkner	Commenced: 7-14-42
Contractor:	Simpson & Noble, Inc.	Completed: 7-31-42
Csg. Record:	10 3/4" @ 194'	Total Depth: 3736
		Dry Hole

LOG

Sand	72
Hard Sand Rock	94
Sand & Shale Streaks	140
Blue Shale	240
Sand	265
Blue Shale	395
Red Bed	767
Anhydrite	780
Red Bed & Shells	1048
Shale & Shells	1617
Lime	1800
Broken Lime	1894
Lime	1974
Broken Lime	2137
Lime	2020
Broken Lime	2510
Shale	2725
Shale & Lime	2750
Shale	2812
Broken Lime	2920
Shale & Lime	2951
Lime (Top Topeka 2951)	3296
Shale & Lime	3346
Shale	3357
Lime (Top Kansas City 3357)	3518
Lime with Streaks of Shale	3594
Shale & Chert	3630
Chert & Shale	3678
Lime	3683
Shale	3729
Lime (Arbuckle)	3736

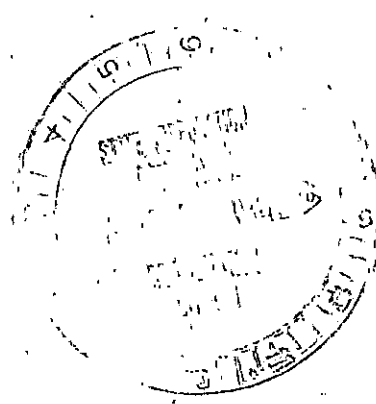

21 21 13W
PAGE 46 LINE 5